


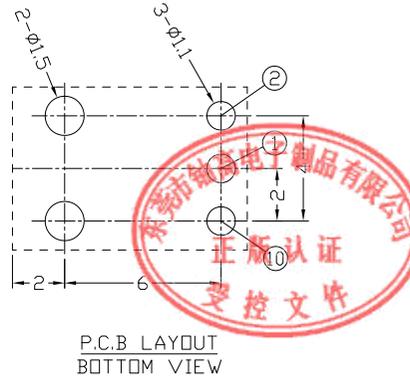


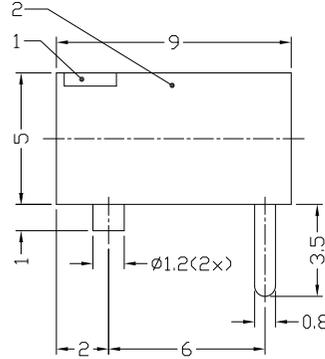


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

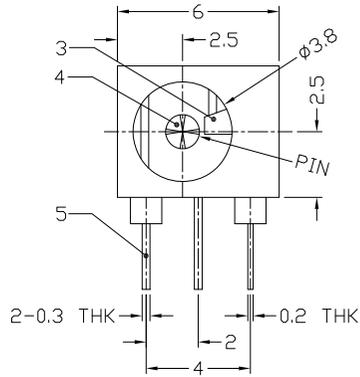

Model No.	C	E
CENTER PIN	ø1.0	ø1.3



DC MATE PLUG

MODEL CODE:

DCJ0-02130- A E 66 BK S 0 4

(1) (2) (3)(4) (5) (6) (7)(8) (9)

(1):Series type:DIP DC POWER JACK.

(2):Series No.

(3):Schematic option: A

(4):Center pin diameter:

C=ø1.0 , E=ø1.3

(5):Material of housing:

66=PA66

(6):Housing color:

BK=Black

(7):Terminal plating

S=Silver(Ag)

(8):Special option:

0=No special option

(9):Packing mode:

4=Bag packing

Specification:

1.Rating : DC 30V 0.3A.

2.Contact resistance : ≤100mΩ.

3.Insulation resistance : ≥100MΩ (500VDC).

4.Withstanding voltage : 500VAC .

5.Insertion and extraction force : 0.3~3Kgs.

6.life test : 5000cycles min.

7.□peration temperature range:-25°C ~85°C

Bill of materials:

NO.	PARTS	MATERIAL	Q'TY	FINISHING
5	TERMINAL	BRASS	1	Ag PLATED OVER Ni PLATED
4	PLUG PIN	BRASS	1	Ag PLATED OVER Ni PLATED
3	SPRING TERMINAL	SUS STRIP	1	Ag PLATED OVER Ni PLATED
2	CASE	NYLON66+94V0+F.G	1	BLACK
1	COVER	NYLON66+94V0+F.G	1	BLACK

GENERAL TOLERANCE
UNITS mm
WITHIN 1.5mm±0.1mm
MAT'L
OVER 1.5mm±0.2mm
SEE NOTE
FINISH
SEE NOTE
Q'TY
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm
MAT'L
SEE NOTE
FINISH
SEE NOTE
Q'TY

东莞市铀高电子制品有限公司			
TITLE: DIP DC POWER JACK		PART NO.: DCJ0-02130	
DR: <i>Ricky</i> 2019/03/20		DWG NO.: ADJ-02130	
CHKD: <i>Ricky</i> 2019/03/20		SCALE 1:1	SHEET 1/1
APPD:		REV. A	CUSTOMER DRAWING