




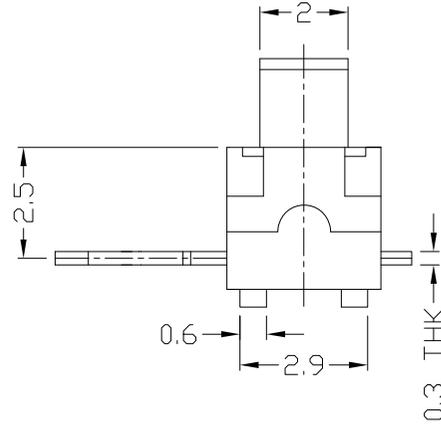

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

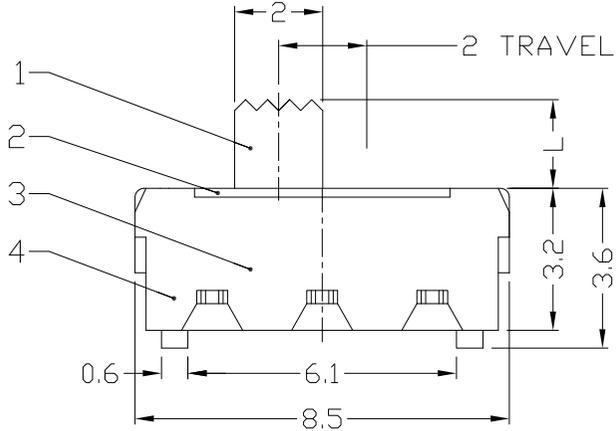



CIRCUIT DIAGRAM

MODEL CODE

YS-1260 - B

L	(mm)
-	2.0
A	2.5
B	3.0
C	4.0
D	4.5

Knob Color	
B	Black

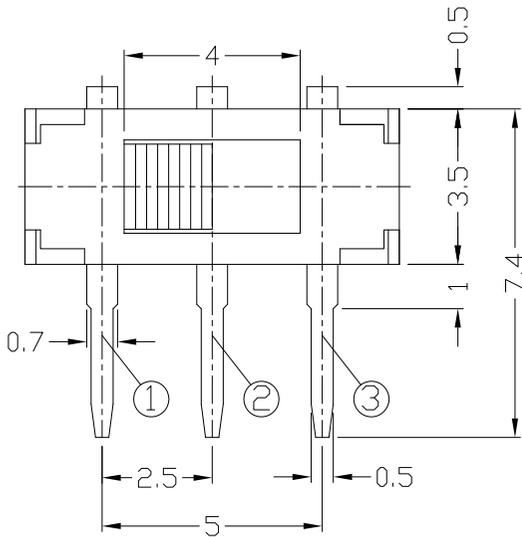


P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC6V 0.3A
CIRCUIT	1P2T
CONTACT RESISTANCE	70mΩ MAX.
TRAVEL	2mm
OPERATING FORCE	150±50gf
OPERATING LIFE(cycles)	10,000



NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7				
6				
5				
4	CASE	PA66/BRASS STRIP	1	BLACK/Ag PLATED
3	CONTACT	BRASS WIRE	1	Au PLATED
2	COVER	SUS	1	NATURAL
1	KNOB	PA66	1	BLACK

WITHIN 1.5mm±0.1mm
OVER 1.5mm±0.2mm

UNITS mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司			
TITLE:		PART NO.:	
MINI SLIDE SWITCH / HORIZONTAL		YS-1260	
DR: Ricky 2015/04/09		DWG NO.:	
CHKD: Ricky 2015/04/09		ADL-1260	
APPD:	SCALE	SHEET	REV.
	5:1	1/1	A
			CUSTOMER DRAWING