Pb Process Capable

RoHS Compliant 2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

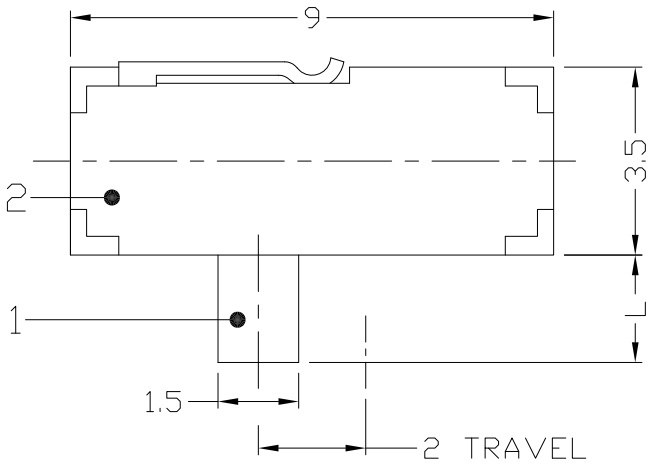

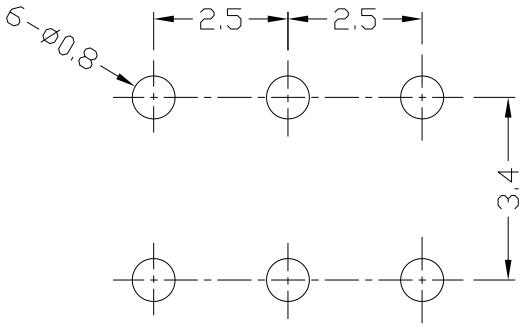

P.C.B LAYOUT

TOP VIEW



CIRCUIT DIAGRAM

MODEL CODE

YS-2245 □ - B

L	(mm)
–	2.0
B	3.0

Knob Color	
B	Black
W	White

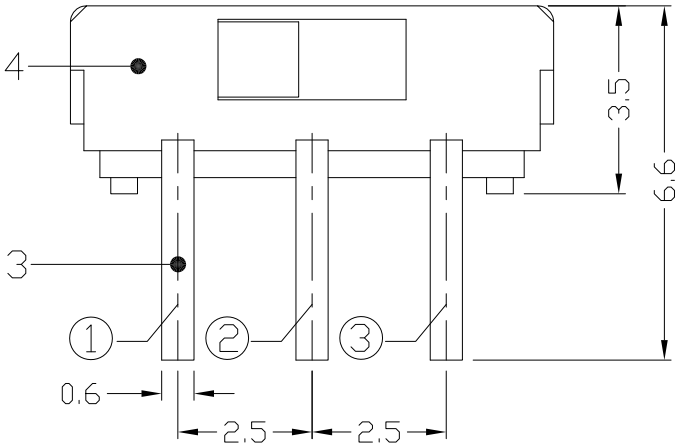

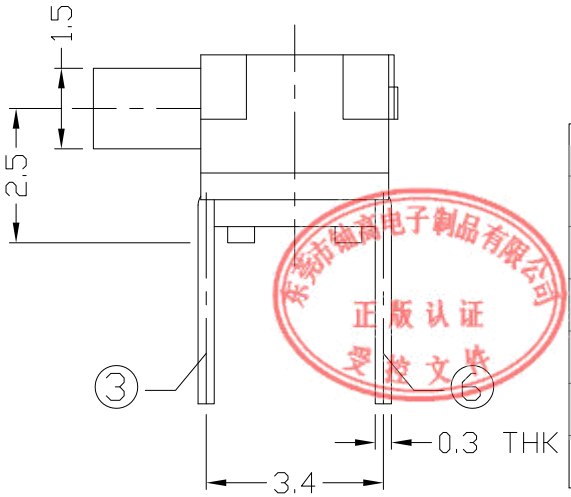

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC6V 0.3A
CIRCUIT	2P2T
TIMING	NON-SHORTING
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	2mm
OPERATING FORCE	250±150gf
OPERATING LIFE(cycles)	10,000

东莞市铀高电子制品有限公司 正版认证 受控文件

NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7				
6				
5	CONTACT	PBS	2	Ag CLAD
4	CASE	NYLON+F.G/PA6T	1	BLACK
3	TERMINAL	BRASS STRIP	1	Ag PLATED
2	COVER	SUS	1	WASHING
1	KNOB	NYLON+F.G/PA46	1	WHITE/BLACK

WITHIN 1.5mm:±0.1mm

OVER 1.5mm:±0.2mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

东莞市铀高电子制品有限公司

TITLE: MINI SLIDE SWITCH / HORIZONTAL

PART NO.: YS-2245

DR: Ricky 2016/12/22

CHKD: Ricky 2016/12/22

APPD:

DWG NO.: AZJ-2245

SCALE	SHEET	REV.	
6:1	1/1	A	CUSTOMER DRAWING