




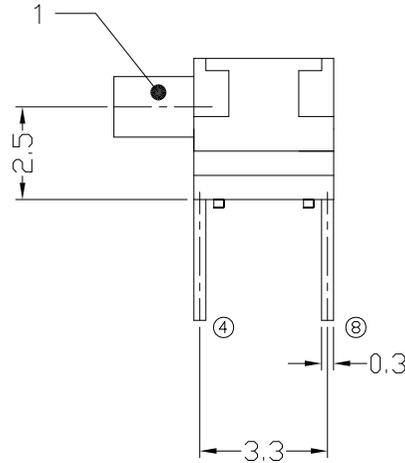

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS


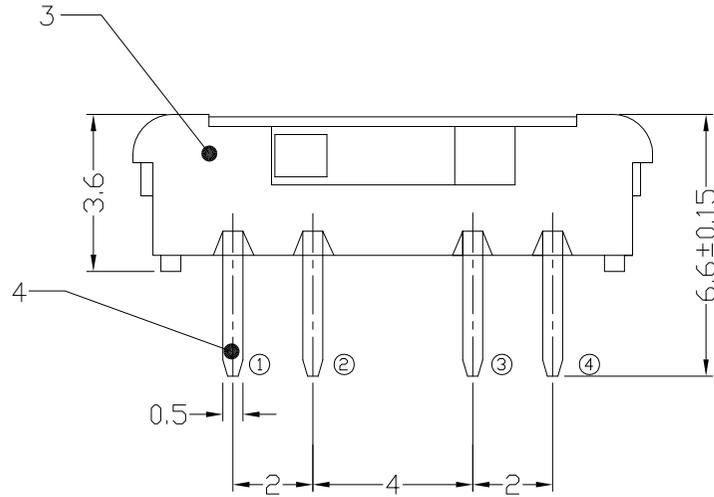


CIRCUIT DIAGRAM

MODEL CODE

YS-2346 - [B]

Knob Color	
B	Black

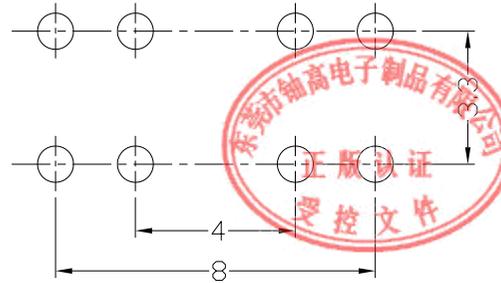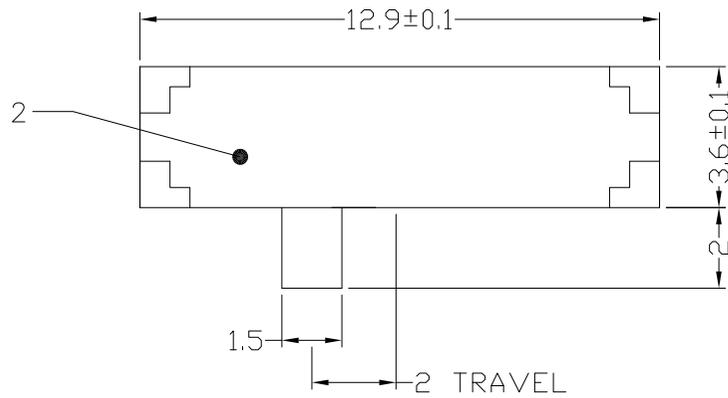

P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC6V 0.3A
CIRCUIT	2P3T
CONTACT RESISTANCE	70mΩ MAX.
TRAVEL	2mm
OPERATING FORCE	250±50gf
OPERATING LIFE(cycles)	10,000

8					
7					
6					
5	CONTACT (CLIP)	BRASS STRIP	2	SILVER PLATED	
4	TERMINAL	BRASS STRIP	8	SILVER PLATED	
3	CASE	PBT	1	BLACK	
2	COVER	SUS	1		
1	KNOB	PBT	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm±0.1mm
OVER 1.5mm±0.2mm

UNITS mm

MAT'L
SEE NOTE

FINISH
SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司			
TITLE: MINI SLIDE SWITCH / HORIZONTAL	PART NO.: YS-2346		
DR: <i>Ricky</i> 2015/04/10	DWG NO.: ADL-2346		
CHKD: <i>Ricky</i> 2015/04/10	SCALE 5:1	SHEET 1/1	REV. A
APPD:	CUSTOMER DRAWING		