



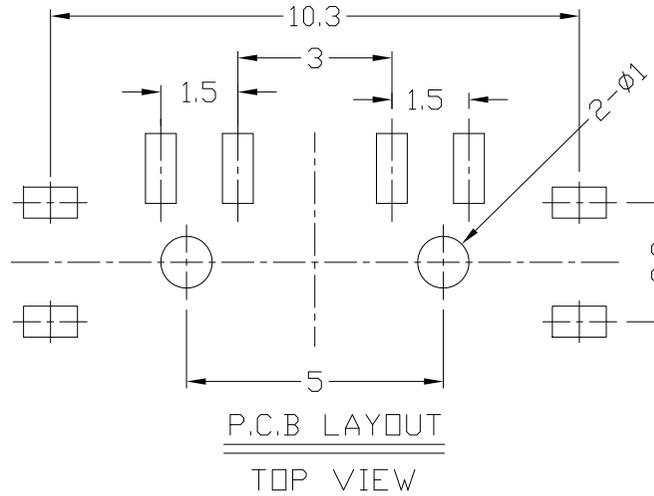


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

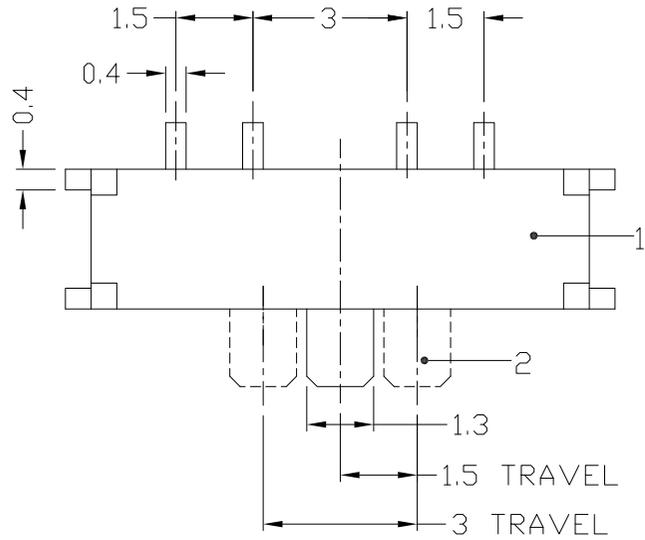



MODEL CODE

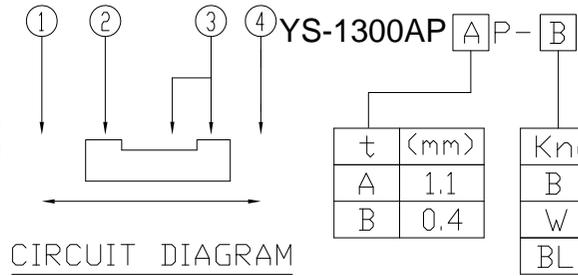

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC6V 0.3A
CIRCUIT	1P2T
TIMING	NON-SHORTING
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	1.5mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

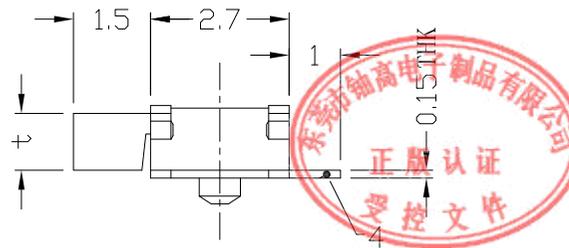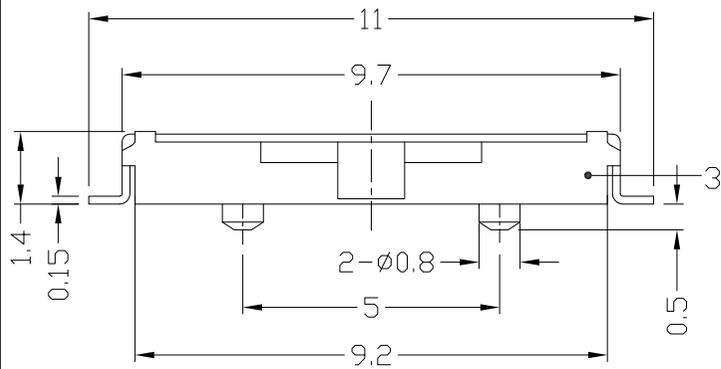

8					
7					WITHIN 1.5mm±0.1mm
6	SPRING PLATE	SUS	1	WASHING	OVER 1.5mm±0.2mm
5	CONTACT	PBS STRIP	1	Ag CLOD	
4	TERMINAL	BRASS STRIP	1	Ag PLATED	
3	COVER	SUS/PBS	1	Ag PLATED	
2	CASE	LCP	1	BLACK	
1	KNOB	PA46	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	东莞市铀高电子制品有限公司			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE:	PART NO.:		
Q'TY		MINI SLIDE SWITCH / HORIZONTAL	YS-1300AP		
		DR: Ricky 2016/12/22	DWG NO.:		
		CHKD: Ricky 2016/12/22	AZJ-1300AP		
		APPD:	SCALE	SHEET	REV.
			1:1	1/1	A
			CUSTOMER DRAWING		