



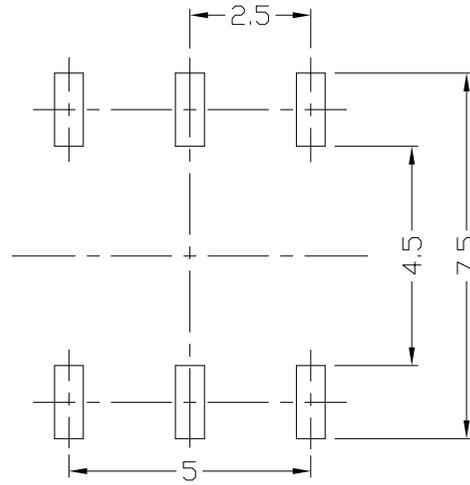


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

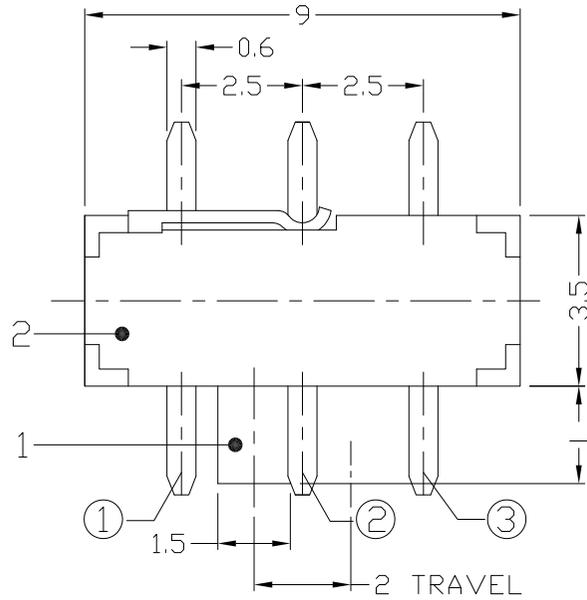

P.C.B LAYOUT
TOP VIEW





CIRCUIT DIAGRAM

MODEL CODE

YS-2245S - B

L (mm)	Knob Color
- 2.0	B Black
B 3.0	W White

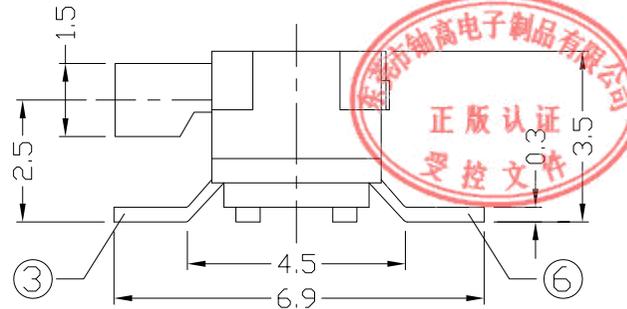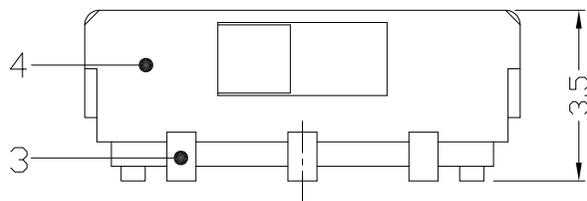


ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC6V 0.3A
CIRCUIT	2P2T
TIMING	NON-SHORTING
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	2mm
OPERATING FORCE	250±150gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm:±0.1mm	UNITS mm
7					OVER 1.5mm:±0.2mm	MAT'L
6						SEE NOTE
5	CONTACT	PBS	2	Ag CLAD		FINISH
4	CASE	NYLON+F.G/PA6T	1	BLACK		SEE NOTE
3	TERMINAL	BRASS STRIP	1	Ag PLATED		Q'TY
2	COVER	SUS	1	WASHING		
1	KNOB	NYLON+F.G/PA46	1	WHITE/BLACK		
NO.	PARTS	MATERIAL	Q'TY	FINISHING		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



东莞市铀高电子制品有限公司

TITLE: MINI SLIDE SWITCH / HORIZONTAL

PART NO.: YS-2245S

DR: Ricky 2016/12/22

DWG NO.: AZJ-2245S

CHKD: Ricky 2016/12/22

SCALE	SHEET	REV.	CUSTOMER
6:1	1/1	A	DRAWING