





RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.


### DIMENSIONS

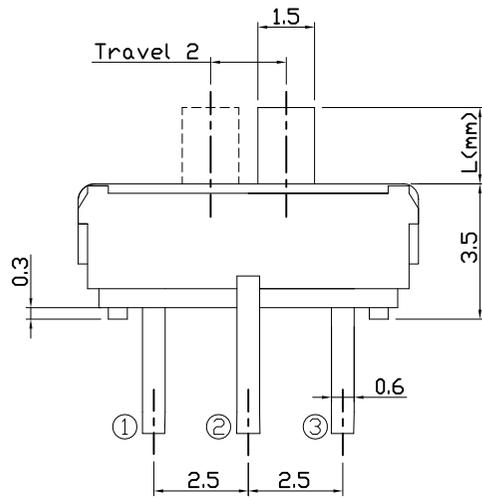

### CIRCUIT DIAGRAM



### PRODUCT IMAGE



### MODEL CODE



YS-1235 □ - B

L	(mm)
-	2.0
A	4.0
B	3.0

Knob Color	
B	Black
W	White

### P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

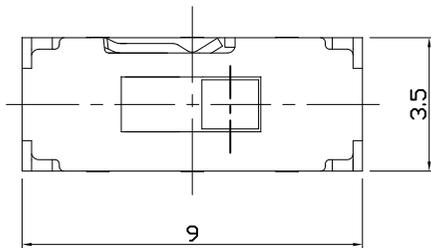

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 6V 0.3A
Circuit	1C-2P
Contact Resistance	70m $\Omega$ Max.
Travel	2.0 $\pm$ 0.3mm
Operating Force	200 $\pm$ 100gf
Operating Life(cycles)	10,000



.X $\pm$ 0.2	X. $\pm$ 2'
UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	SEE NOTE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS				东莞市铀高电子制品有限公司			
MAT'L				TITLE: MINI SLIDE SWITCH			
SEE NOTE				PARI NO.: YS-1235			
FINISH				DR: Ricky 2014/04/03			
SEE NOTE				DWG NO.: ASI-1235			
Q'TY				CHKD: Ricky 2014/04/03			
APPD:				SCALE		SHEET	
				1:1		1/1	
				REV.		CUSTOMER DRAWING	
				A			