



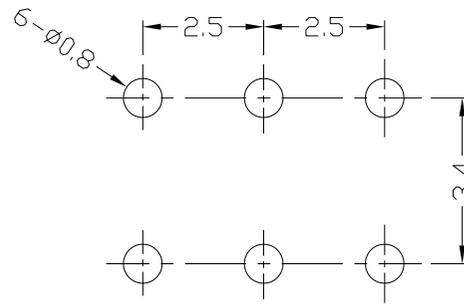


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

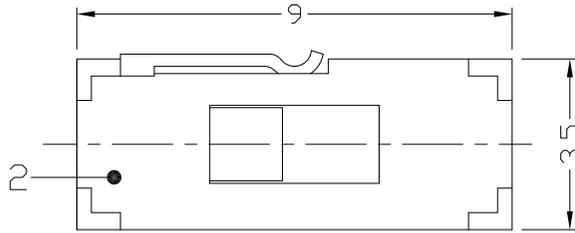

P.C.B LAYOUT
TOP VIEW





CIRCUIT DIAGRAM

MODEL CODE

YS-2235 - B

L	(mm)	Knob Color	
-	2.0	B	Black
B	3.0	W	White

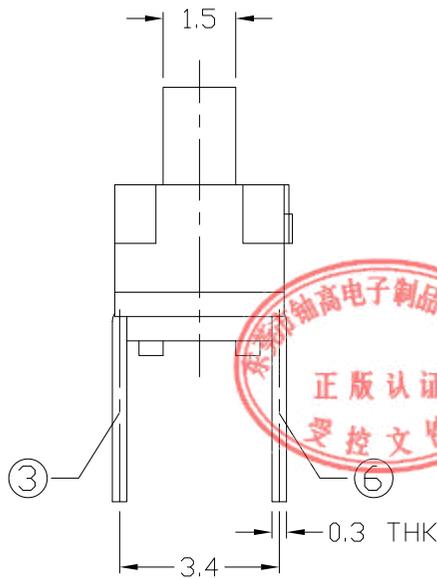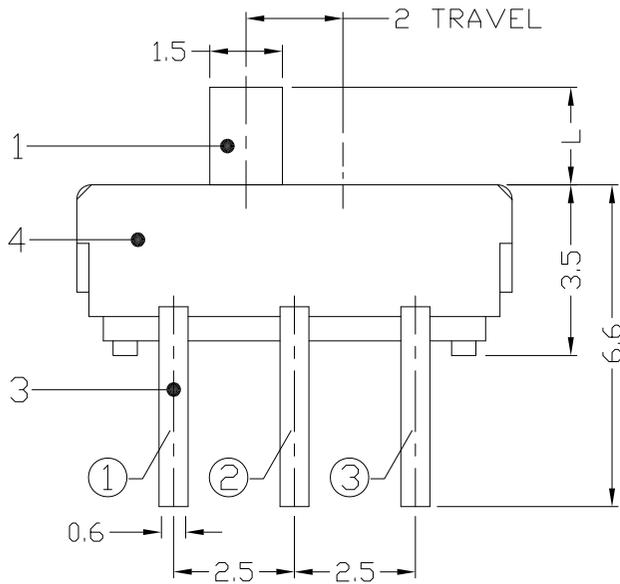

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC6V 0.3A
CIRCUIT	2P2T
TIMING	NON-SHORTING
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	2mm
OPERATING FORCE	250±150gf
OPERATING LIFE(cycles)	10,000



8							
7							
6							
5	CONTACT	PBS	2	Ag CLAD			
4	CASE	NYLON+F.G/PA6T	1	BLACK			
3	TERMINAL	BRASS STRIP	1	Ag PLATED			
2	COVER	SUS	1	WASHING			
1	KNOB	NYLON+F.G/PA46	1	WHITE/BLACK			
NO.	PARTS	MATERIAL	Q'TY	FINISHING			

WITHIN 1.5mm±0.1mm
OVER 1.5mm±0.2mm

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司			
TITLE:	MINI SLIDE SWITCH / VERTICAL	PART NO.:	YS-2235
DR:	Ricky 2016/12/22	DWG NO.:	AZJ-2235
CHKD:	Ricky 2016/12/22	SCALE	6:1
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER DRAWING	