



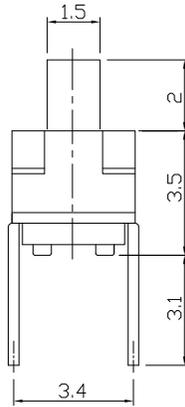


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

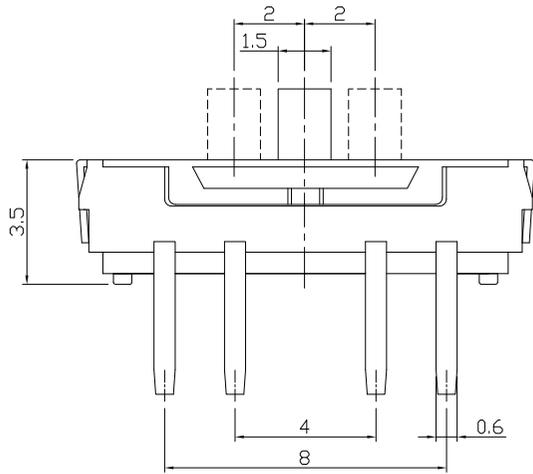

CIRCUIT DIAGRAM



PRODUCT IMAGE



MODEL CODE



YS-2336 -

L	(mm)
-	2.0

Knob Color	
B	Black
W	White

P.C.B MOUNTING PATTERN DIMENSION


The following soldering patterns are recommended for reflow soldering

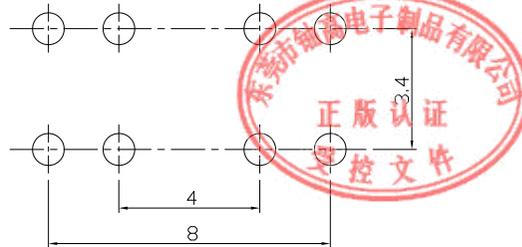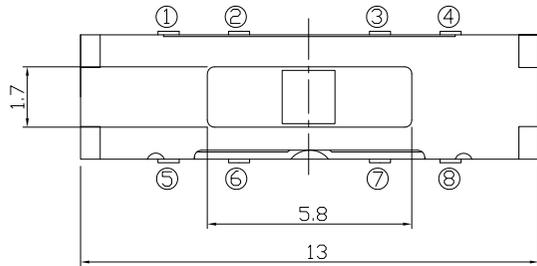

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 6V 0.3A
Circuit	2C-3P
Contact Resistance	70mΩ Max.
Travel	2.0 ± 0.3mm
Operating Force	250±100gf
Operating Life(cycles)	10,000



.X ±0.2 X. ±2'
UNITS mm
MAT'L
SEE NOTE
FINISH
SEE NOTE
Q'TY
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm			
MAT'L			
SEE NOTE			
FINISH			
SEE NOTE			
Q'TY			
东莞市铀高电子制品有限公司			
TITLE: MINI SLIDE SWITCH		PART NO.: YS-2336	
DR: <i>Ricky</i> 2014/04/03		DWG NO.:	
CHKD: <i>Ricky</i> 2014/04/03		SCALE SHEET REV. CUSTOMER	
APPD:		1:1	1/1 A DRAWING