



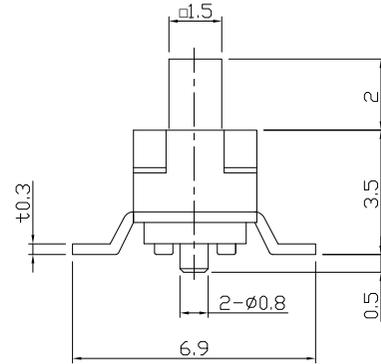


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.


DIMENSIONS

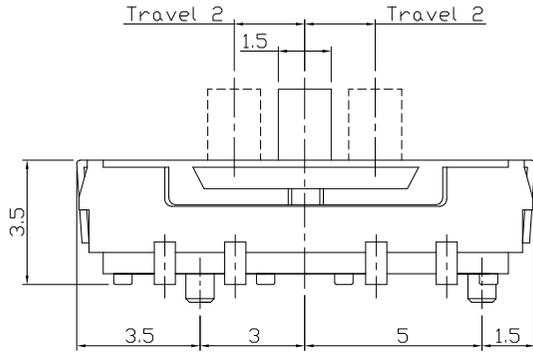

CIRCUIT DIAGRAM



PRODUCT IMAGE




MODEL CODE

YS-2336S


L	(mm)
-	2.0

Knob Color	
B	Black
W	White

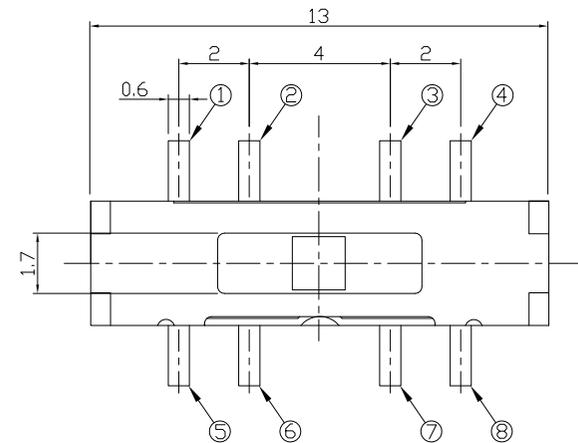

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

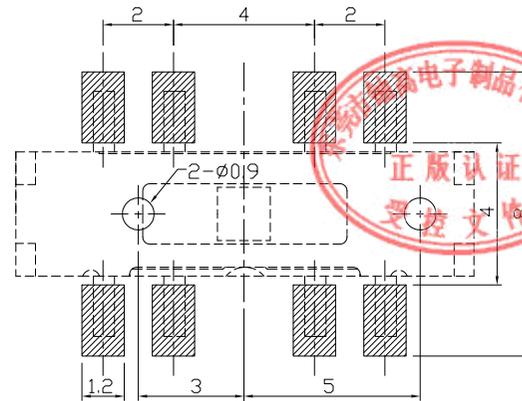

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 6V 0.3A
Circuit	2C-3P
Contact Resistance	70m Ω Max.
Travel	2.0 \pm 0.3mm
Operating Force	250 \pm 100gf
Operating Life(cycles)	10,000

.X \pm 0.2 X. \pm 2'

UNITS mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



东莞市铀高电子制品有限公司

TITLE:
MINI SLIDE SWITCH

PART NO.:
YS-2336S

DR: Ricky 2014/04/03

DWG NO.: ASI-2336S

CHKD: Ricky 2014/04/03

APPD:

SCALE

SHEET

REV.

CUSTOMER

1:1

1/1

A

DRAWING