





RoHS Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

**DIMENSIONS**

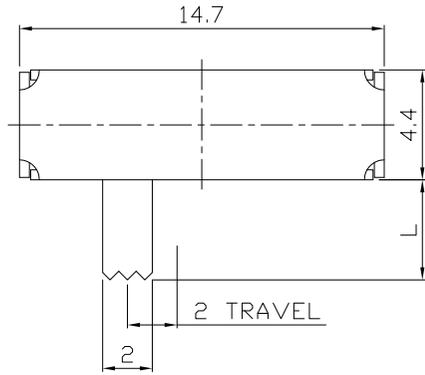


**MODEL CODE**


SK-14D12-GFB

Knob Type
GFB
VAC



L(mm)
~

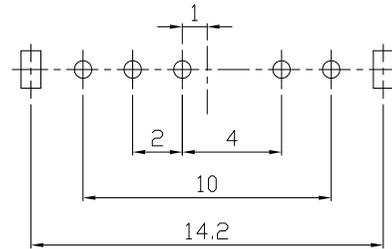

P.C.B LAYOUT  
BOTTOM VIEW

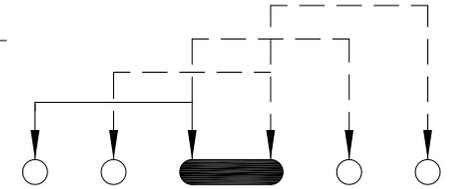

CIRCUIT DIAGRAM

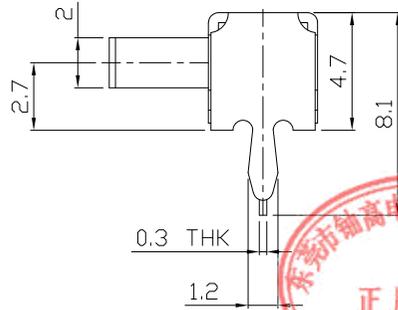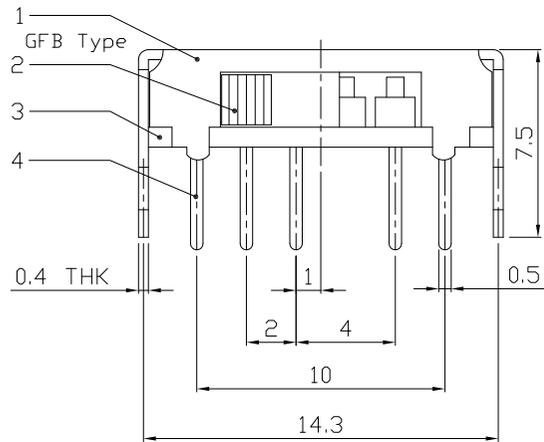

**ELECTRO-MECHANICAL CHARACTERISTICS**

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8					
7					
6	SPRING PLATE	SUS	1	NATURAL	
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED	
4	TERMINAL	BRASS STRIP	5	Ag PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	KNOB	POM	1	BLACK	
1	FRAME	STEEL STRIP	1	Ni PLATED	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm: ±0.1mm  
OVER 1.5mm: ±0.2mm

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

<b>东莞市铀高电子制品有限公司</b>			
TITLE: SLIDE SWITCH / HORIZONTAL		PART NO.: SK-14D12	
DR: Ricky 2016/06/23		DWG NO.: ADL-14D12	
CHKD: Ricky 2016/06/23		SCALE: 3:1	SHEET: 1/1
APPD:		REV.: A	CUSTOMER DRAWING