



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

MODEL CODE

SK-22D09-GEI






Knob Type

GEI
PGA
GFB
VAC


L(mm)

~

DIMENSIONS

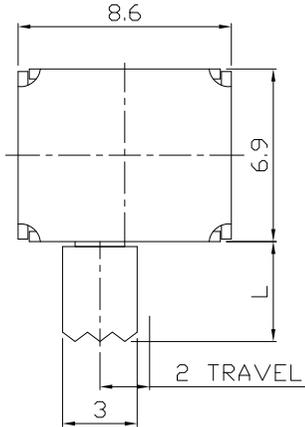

P.C.B LAYOUT
BOTTOM VIEW





CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

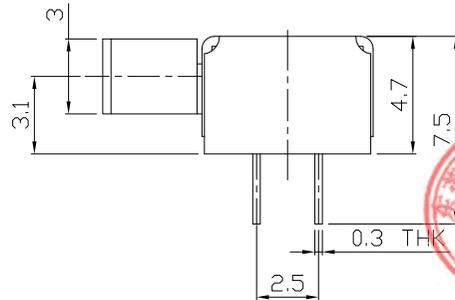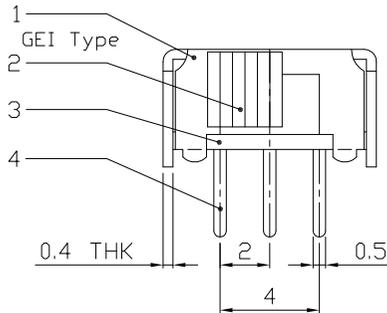

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市铀高电子制品有限公司						
7					OVER 1.5mm: ±0.2mm	MAT'L								
6	SPRING PLATE	PBS STRIP	1	NATURAL		SEE NOTE		TITLE:	SLIDE SWITCH / HORIZONTAL			PART NO.	SK-22D09	
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED				DR:	Ricky 2016/06/24			DWG NO.:	ADL-22D09	
4	TERMINAL	BRASS STRIP	6	Ag PLATED				FINISH	SEE NOTE					
3	BASE	PHENOLIC RESIN	1	NATURAL				Q'TY	Ricky 2016/06/24			SCALE	4:1	
2	KNOB	PPOM	1	BLACK					APPD:		SHEET	1/1	REV.	A
1	FRAME	STEEL STRIP	1	Ni PLATED							CUSTOMER	DRAWING		
NO.	PARTS	MATERIAL	Q'TY	FINISHING										

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.