








RoHS  
Compliant  
2002/95/EC

### MODEL CODE

SK-22D13-GBG

REV.	ECN.	NO.	APPD.


### DIMENSIONS

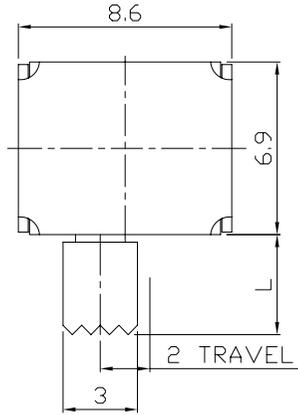


Knob Type

GBG
VAA
PGA
GFB
VAC

L(mm)  
~



P.C.B LAYOUT  
BOTTOM VIEW





CIRCUIT DIAGRAM

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 30V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

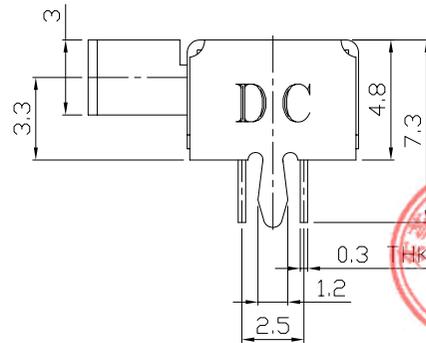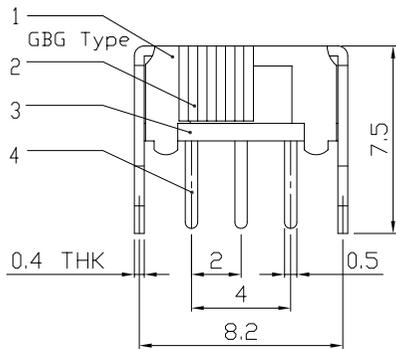

NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7				
6	SPRING PLATE	SUS	1	NATURAL
5	CONTACT CLIP	PBS C5210R-EH	2	Ag CLAD
4	TERMINAL	BRASS STRIP	6	Ag PLATED OVER Ni PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	KNOB	POM/NYLON+F.G+94V0	1	BLACK
1	FRAME	STEEL STRIP	1	Ni PLATED

WITHIN 1.5mm: ±0.1mm  
OVER 1.5mm: ±0.2mm

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

<b>东莞市铀高电子制品有限公司</b>			
TITLE: SLIDE SWITCH / HORIZONTAL		PART NO.: SK-22D13	
DR: Ricky 2015/12/15		DWG NO.: ADJ-22D13	
CHKD: Ricky 2015/12/15		SCALE: 4:1	SHEET: 1/1
APPD:		REV.: A	CUSTOMER DRAWING