








RoHS
Compliant
2002/95/EC

MODEL CODE

SK-22D32-GEI

REV.	ECN.	NO.	APPD.


DIMENSIONS

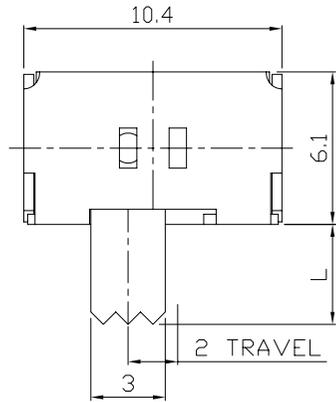


Knob Type

GEI
VAA
PGA
GEE
VAC

L(mm)
~



P.C.B LAYOUT
BOTTOM VIEW





CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 30V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

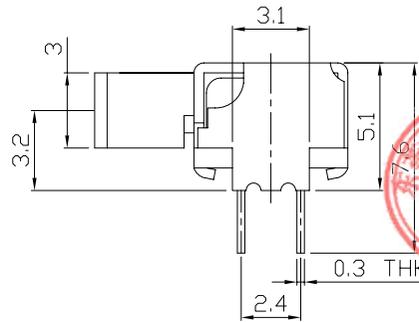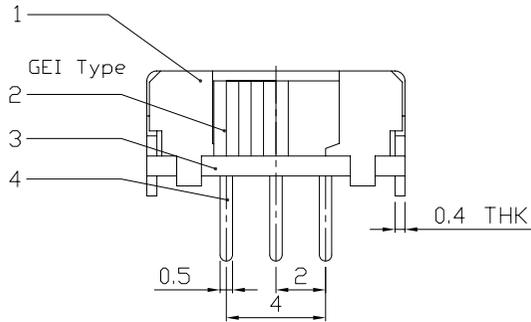

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm
7					OVER 1.5mm: ±0.2mm	MAT'L	
6	CONTACT CLIP	PBS C5210R-EH	2	Ag CLAD		SEE NOTE	
5	SPRING PLATE	SUS	1	NATURAL		FINISH	
4	TERMINAL	BRASS STRIP	6	Ag PLATED OVER Ni PLATED		SEE NOTE	
3	BASE	PHENOLIC RESIN	1	NATURAL		Q'TY	
2	KNOB	POM	1	BLACK			
1	FRAME	STEEL STRIP	1	Ni PLATED			
NO.	PARTS	MATERIAL	Q'TY	FINISHING			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

东莞市铀高电子制品有限公司			
TITLE: SLIDE SWITCH / HORIZONTAL		PART NO.: SK-22D32	
DR: <i>Ricky</i> 2015/12/11		DWG NO.: ADJ-22D32	
CHKD: <i>Ricky</i> 2015/12/11		SCALE	SHEET
APPD:		4:1	1/1
		REV.	CUSTOMER DRAWING
		A	