






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

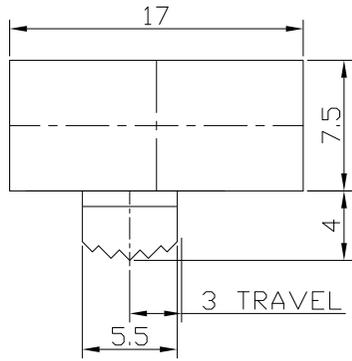



MODEL CODE

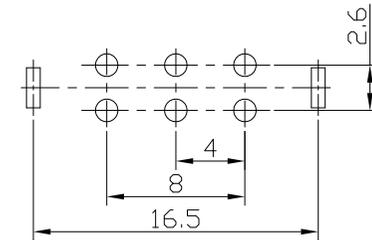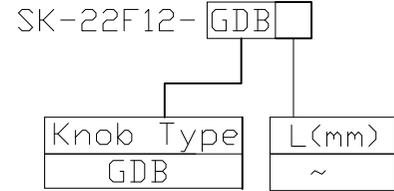

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

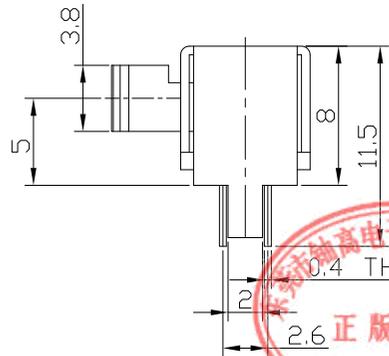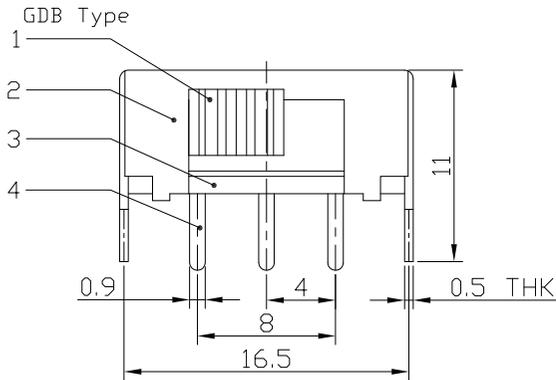

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市铀高电子制品有限公司						
7					OVER 1.5mm: ±0.2mm	MAT'L								
6	CONTACT	BRASS STRIP	2	Ag PLATED		SEE NOTE		TITLE:	SLIDE SWITCH / HORIZONTAL			PART NO.:	SK-22F12	
5	SPRING	STEEL STRIP	2	NATURAL				DR:	Ricky 2016/06/24			DWG NO.:	ADL-22F12	
4	TERMINAL	BRASS STRIP	6	Ag PLATED				CHKD:	Ricky 2016/06/24			SCALE	5:2	
3	BASE	PHENOLIC RESIN	1	BLACK				APPD:			SHEET	1/1	REV.	A
2	FRAME	STEEL STRIP	1	Ni PLATED							CUSTOMER	DRAWING		
1	KNOB	POM	1	BLACK										
NO.	PARTS	MATERIAL	Q'TY	FINISHING										

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

