





RoHS
Compliant
2002/95/EC

MODEL CODE

SK-22H07-GFB


REV.	ECN.	NO.	APPD.

DIMENSIONS

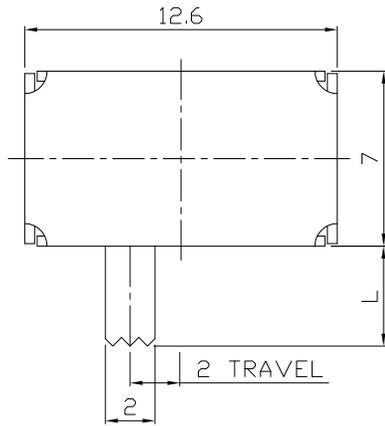


Knob Type
GFB
VAC



L(mm)
~

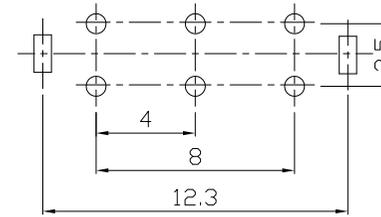

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

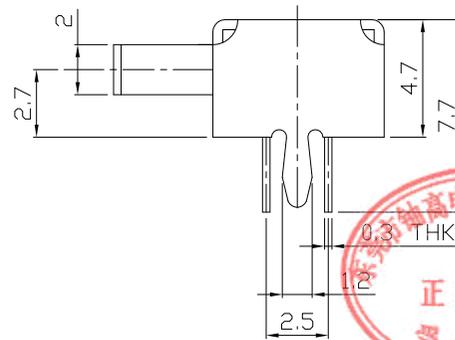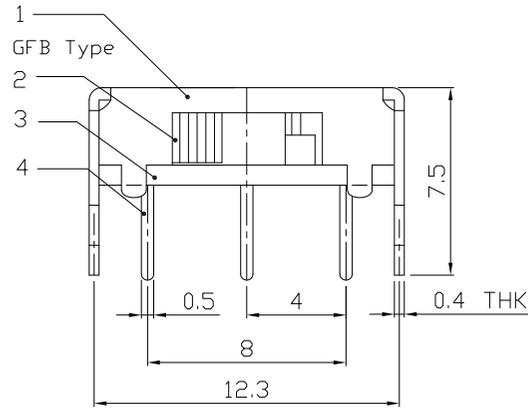

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000



8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市铷高电子制品有限公司					
7					OVER 1.5mm: ±0.2mm	MAT'L							
6	SPRING PLATE	PBS STRIP	1	NATURAL		SEE NOTE		TITLE:	SLIDE SWITCH / HORIZONTAL			PART NO.:	SK-22H07
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED				DR:	Ricky 2016/06/21			DWG NO.:	ADL-22H07
4	TERMINAL	BRASS STRIP	6	Ag PLATED				CHKD:	Ricky 2016/06/21			SCALE	7:2
3	BASE	PHENOLIC RESIN	1	NATURAL				APPD:		SHEET	1/1	REV.	A
2	FRAME	STEEL STRIP	1	Ni PLATED						CUSTOMER	DRAWING		
1	KNOB	POM	1	BLACK									
NO.	PARTS	MATERIAL	Q'TY	FINISHING									

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

