




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS


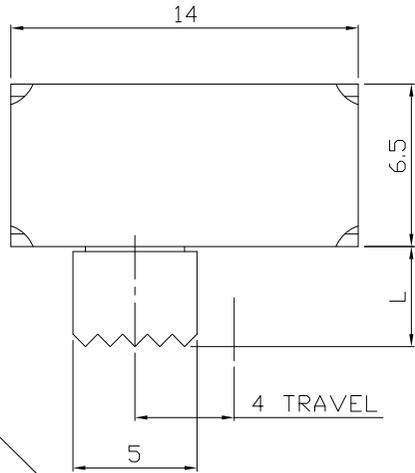


1
GEP Type



2

3


4

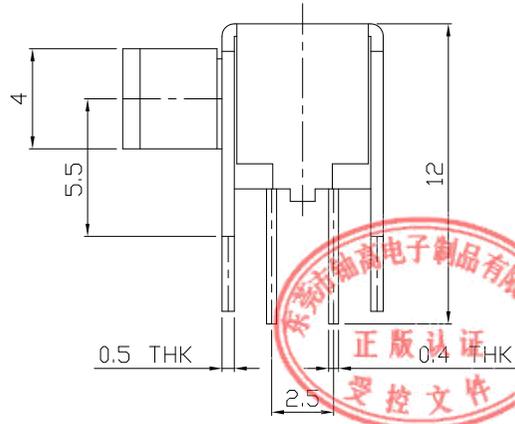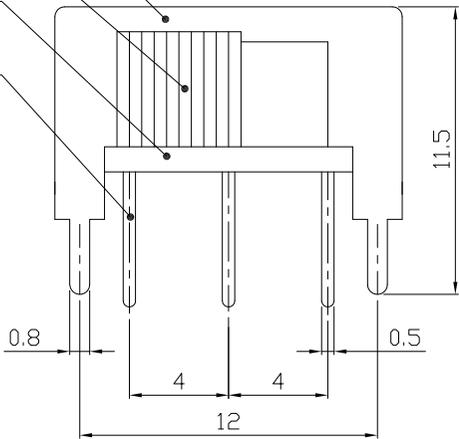

MODEL CODE

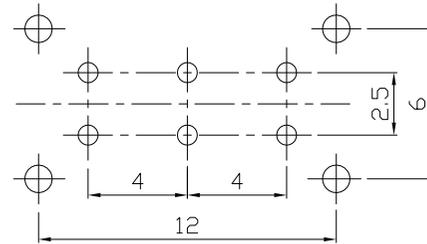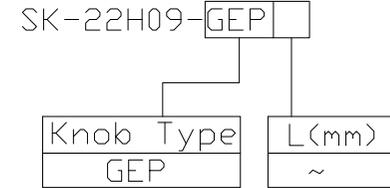

P.C.B LAYOUT
BOTTOM VIEW




CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	SHORTING
TRAVEL	4mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8							
7	STEEL BALL	SUS	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	东莞市铀高电子制品有限公司
6	SPRING	SUS WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	mm	
5	CLIP	PBS	2	Ag PLATED		MAT'L	TITLE: SLIDE SWITCH / HORIZONTAL PART NO.: SK-22H09
4	TERMINAL	BRASS STRIP	6	Ag PLATED		SEE NOTE	
3	TERMINAL BASE	PHENOLIC RESIN	1	NATURAL		FINISH	DR: Ricky 2016/08/11 DWG NO.: AZJ-22H09
2	COVER	MILD STEEL	1	Ni PLATED		SEE NOTE	
1	KNOB	POM	1	BLACK		Q'TY	CHKD: Ricky 2016/08/11
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



SCALE	SHEET	REV.	CUSTOMER DRAWING
3:1	1/1	A	