





RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

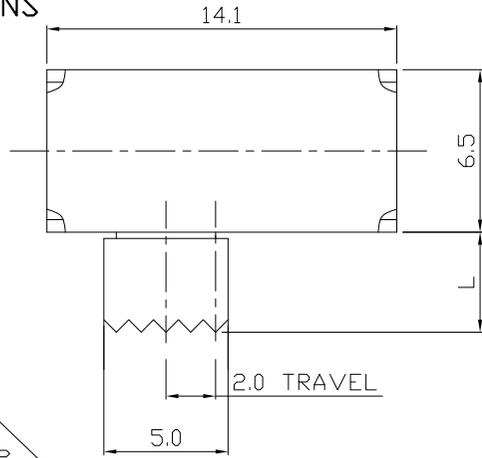

1 GEP Type
2

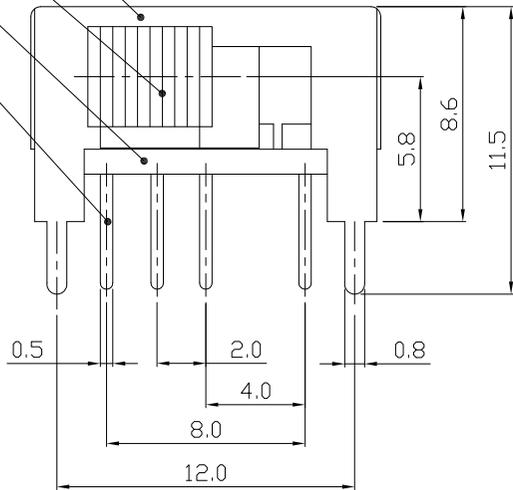


3
4

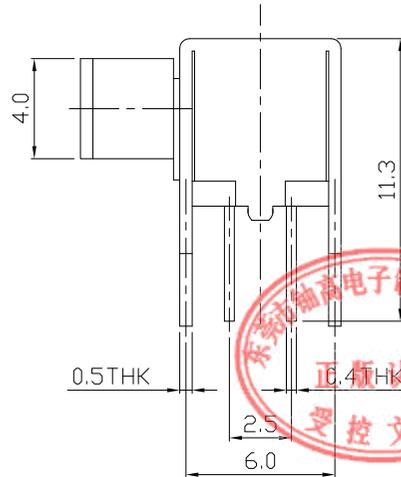


MODEL CODE

SK-23D09-GEP

Knob Type	L(mm)
GEP	~

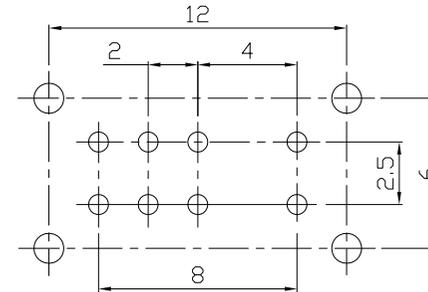

P.C.B LAYOUT
BOTTOM VIEW

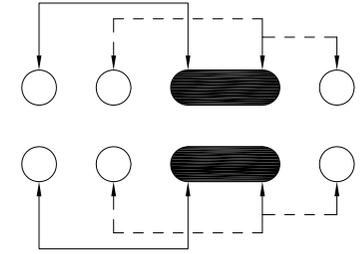

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8							
7	STEEL BALL	SUS	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm
6	SPRING	SUS WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	
5	CLIP	PBS	2	Ag PLATED		SEE NOTE	TITLE: SLIDE SWITCH / HORIZONTAL
4	TERMINAL	BRASS STRIP	6	Ag PLATED		FINISH	
3	TERMINAL BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE	DR: Ricky 2016/08/11
2	KNOB	POM	1	BLACK		Q'TY	CHKD: Ricky 2016/08/11
1	COVER	MILD STEEL	1	Ni PLATED			APPD:
NO.	PARTS	MATERIAL	Q'TY	FINISHING			SCALE SHEET REV. CUSTOMER DRAWING
							3:1 1/1 A

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



东莞市铀高电子制品有限公司

TITLE: SLIDE SWITCH / HORIZONTAL	PART NO.: SK-23D09
DR: Ricky 2016/08/11	DWG NO.: AZJ-23D09
CHKD: Ricky 2016/08/11	SCALE SHEET REV. CUSTOMER DRAWING
APPD:	3:1 1/1 A