





RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



DIMENSIONS

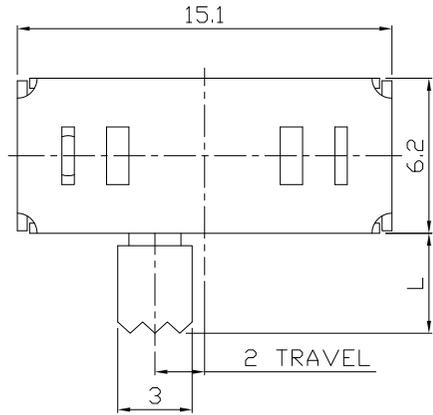

MODEL CODE



SK-23D26-GEI

Knob Type	L(mm)
GEI	~
PGA	~

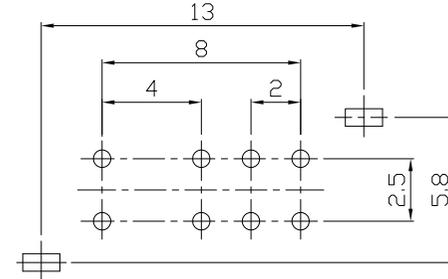

P.C.B LAYOUT
BOTTOM VIEW


CIRCUIT DIAGRAM

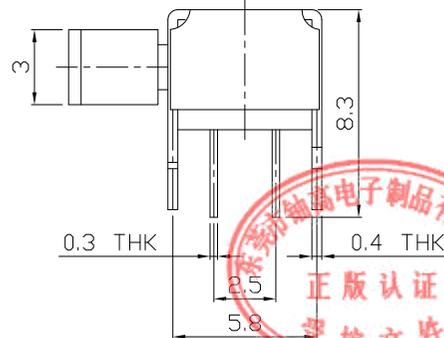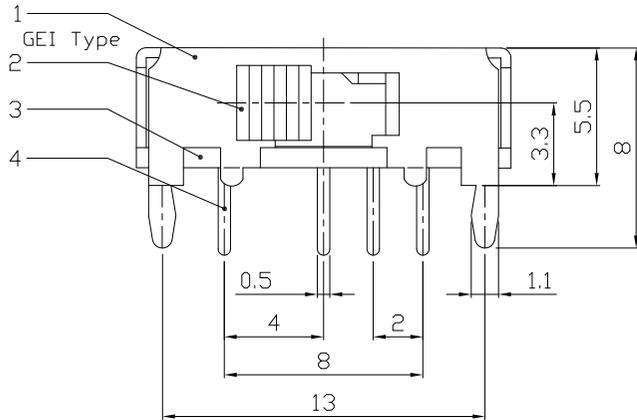

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000



8											
7											
6	SPRING PLATE	SUS	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm				
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED	OVER 1.5mm: ±0.2mm	MAT'L					
4	TERMINAL	BRASS STRIP	8	Ag PLATED		SEE NOTE	TITLE: SLIDE SWITCH / HORIZONTAL				
3	BASE	PHENOLIC RESIN	1	NATURAL		FINISH		PART NO.: SK-23D26			
2	KNOB	POM	1	BLACK		SEE NOTE	DR: Ricky 2016/07/11	DWG NO.: ADL-23D26			
1	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY	CHKD: Ricky 2016/07/11	SCALE	SHEET	REV.	CUSTOMER
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:	3:1	1/1	A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



东莞市铀高电子制品有限公司

TITLE:
SLIDE SWITCH / HORIZONTAL
DR: Ricky 2016/07/11
CHKD: Ricky 2016/07/11
APPD:

PART NO.:
SK-23D26
DWG NO.:
ADL-23D26
SCALE: 3:1
SHEET: 1/1
REV.: A
CUSTOMER DRAWING