




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

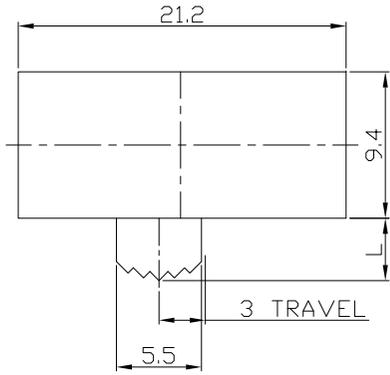

MODEL CODE

SK-42F01-GDB

Knob Type	L(mm)
GDB	~


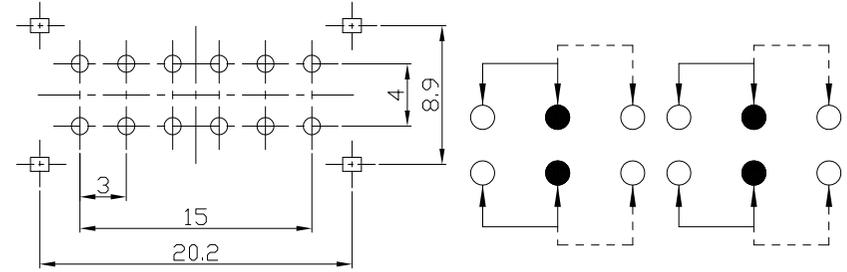


P.C.B LAYOUT

BOTTOM VIEW

CIRCUIT DIAGRAM

GDB Type

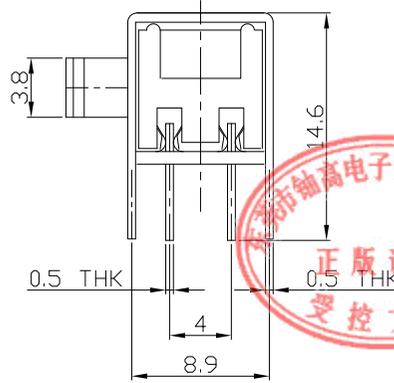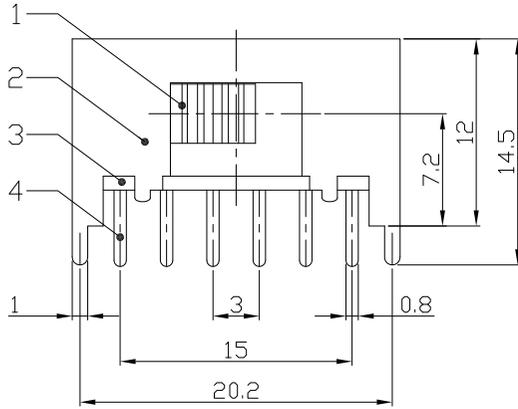

ELECTRO-MECHANICAL CHARACTERISTICS


Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	3mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000



8							
7	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	东莞市铀高电子制品有限公司
6	SPRING	STEEL WIER	1	TEMPER	OVER 1.5mm: ±0.2mm	mm	
5	CONTACT CLIP	PBS STRIP	4	Ag PLATED		MAT'L	TITLE: SLIDE SWITCH / HORIZONTAL
4	TERMINAL	BRASS STRIP	12	Ag PLATED		SEE NOTE	
3	BASE	PHENOLIC RESIN	1	NATURAL		FINISH	DR: Ricky 2016/07/15
2	FRAME	STEEL STRIP	1	Ni PLATED		SEE NOTE	
1	KNOB	PDM	1	BLACK		Q'TY	CHKD: Ricky 2016/07/15
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



SCALE	SHEET	REV.	CUSTOMER DRAWING
2:1	1/1	A	