



RoHS
Compliant
2002/95/EC




REV.	ECN.	NO.	APPD.

MODEL CODE

SK-42H13-GDB

Knob Type	L(mm)
GDB	~

DIMENSIONS

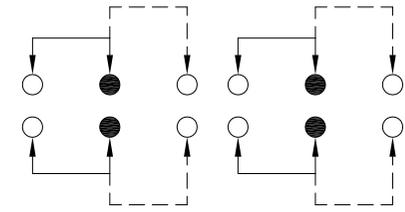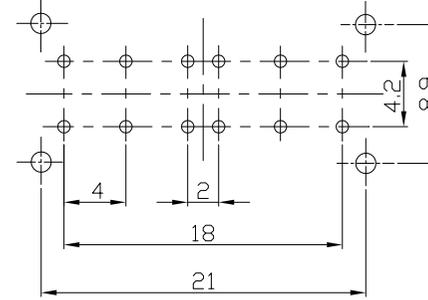
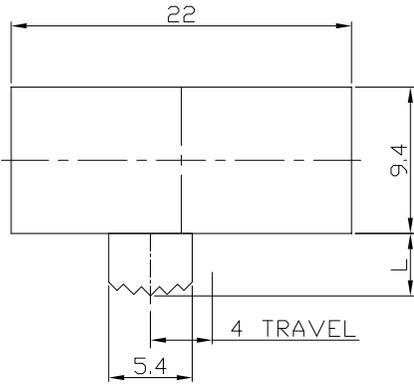


P.C.B LAYOUT

BOTTOM VIEW

CIRCUIT DIAGRAM

GDB Type

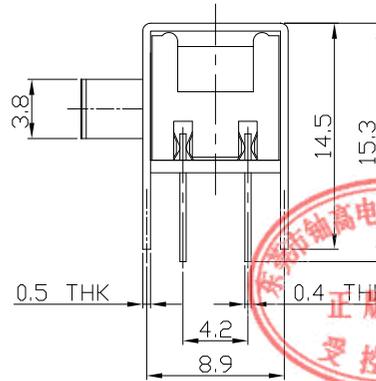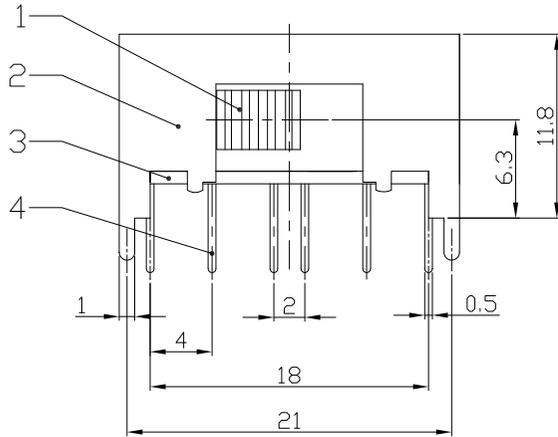

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	4mm
OPERATING FORCE	200±80gf
OPERATING LIFE(cycles)	10,000



8					
7	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm
6	SPRING	STEEL WIRE	1	TEMPER	OVER 1.5mm: ±0.2mm
5	CONTACT CLIP	PBS STRIP	4	Ag PLATED	
4	TERMINAL	BRASS STRIP	12	Ag PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	KNOB	POM	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

UNITS mm
MAT'L
SEE NOTE
FINISH
SEE NOTE
Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

SEE NOTE	TITLE:	PART NO.:
SEE NOTE	SLIDE SWITCH / HORIZONTAL	SK-42H13
Q'TY	DR: Ricky 2016/07/14	DWG NO.:
	CHKD: Ricky 2016/07/14	ADL-42H13
	APPD:	SCALE SHEET REV. CUSTOMER DRAWING
		2:1 1/1 A

东莞市铀高电子制品有限公司

SLIDE SWITCH / HORIZONTAL
DR: Ricky 2016/07/14
CHKD: Ricky 2016/07/14
APPD:

PART NO.: SK-42H13
DWG NO.: ADL-42H13
SCALE SHEET REV. CUSTOMER DRAWING
2:1 1/1 A