



RoHS  
Compliant  
2002/95/EC



REV.	ECN.	NO.	APPD.

MODEL CODE

SK-43D08- PGA

Knob Type	L(mm)
PGA	~



DIMENSIONS

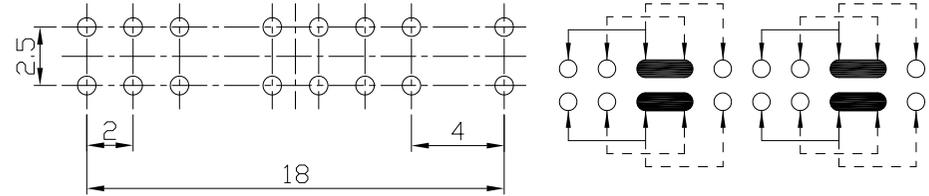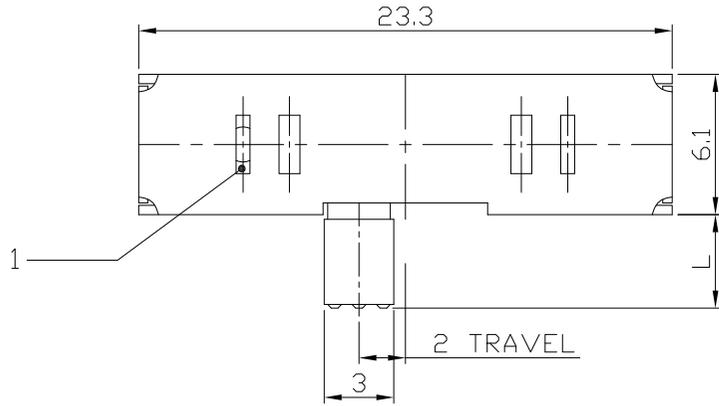

P.C.B LAYOUT

CIRCUIT DIAGRAM

BOTTOM VIEW

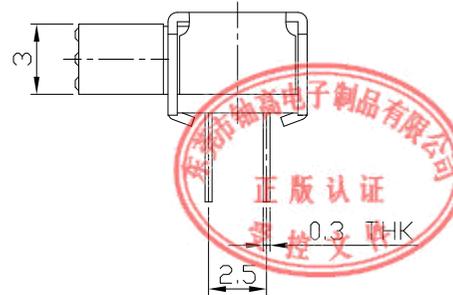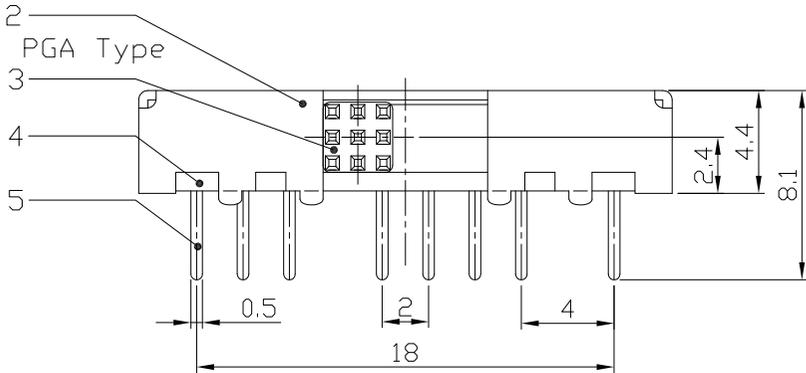

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	<b>东莞市铀高电子制品有限公司</b>						
7					OVER 1.5mm: ±0.2mm	MAT'L								
6	CONTACT CLIP	PBS STRIP	4	Ag PLATED		SEE NOTE		TITLE:	SLIDE SWITCH / HORIZONTAL			PART NO.:	SK-43D08	
5	TERMINAL	BRASS STRIP	16	Ag PLATED				DR:	Ricky 2016/07/18			DWG NO.:	ADL-43D08	
4	BASE	PHENDLIC RESIN	1	NATURAL				CHKD:	Ricky 2016/07/18			SCALE	3:1	
3	KNOB	PDM	1	BLACK				APPD:			SHEET	1/1	REV.	A
2	FRAME	STEEL STRIP	1	Ni PLATED							CUSTOMER	DRAWING		
1	SPRING PLATE	PBS STRIP	1	NATURAL										
NO.	PARTS	MATERIAL	Q'TY	FINISHING										

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.