



RoHS
Compliant
2002/95/EC



REV.	ECN. NO.	APPD.

MODEL CODE

SK-43D09- PGA

Knob Type	L(mm)
PGA	~


DIMENSIONS

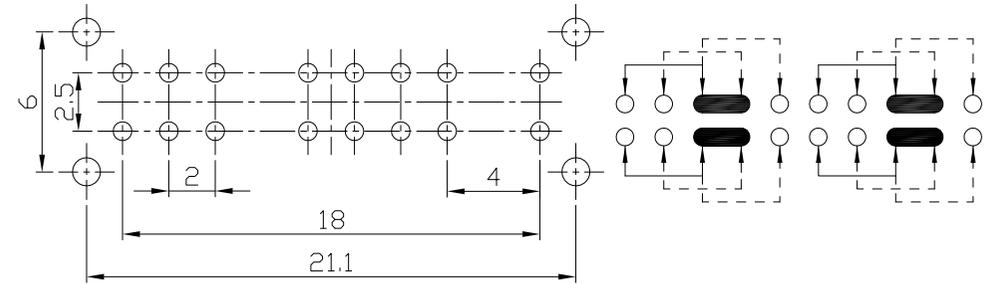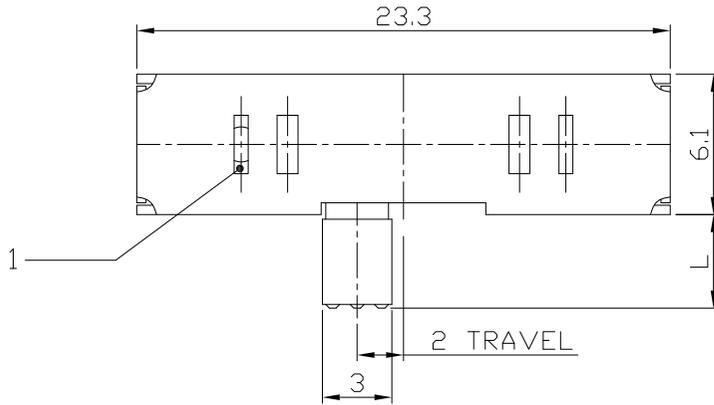

P.C.B LAYOUT

BOTTOM VIEW

CIRCUIT DIAGRAM

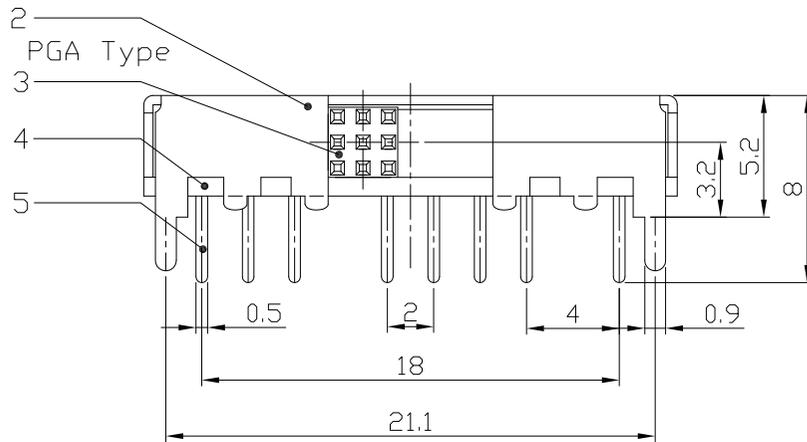

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					
7					
6	CONTACT CLIP	PBS STRIP	4	Ag PLATED	
5	TERMINAL	BRASS STRIP	16	Ag PLATED	
4	BASE	PHENDLIC RESIN	1	NATURAL	
3	KNOB	POM	1	BLACK	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	SPRING PLATE	PBS STRIP	1	NATURAL	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

UNITS mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司

TITLE: SLIDE SWITCH / HORIZONTAL PART NO.: SK-43D09

DR: *Ricky* 2016/07/18 DWG NO.: ADL-43D09

CHKD: *Ricky* 2016/07/18

APPD:

SCALE	SHEET	REV.	CUSTOMER DRAWING
3:1	1/1	A	