





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.


DIMENSIONS



P.C.B MOUNTING PATTERN DIMENSION



CIRCUIT DIAGRAM





MODEL CODE

YT-1102L-

	H	φA
-	4.3	3.5
A	5.0	3.4
B	7.0	3.3
E	7.3	3.3
C	8.0	3.3
Q	6.0	3.4
D	9.5	3.3
F	12.5	3.3
FL	13.0	3.0
G	13.5	3.0
I	17.0	3.0

0.25±0.1mm TRAVEL

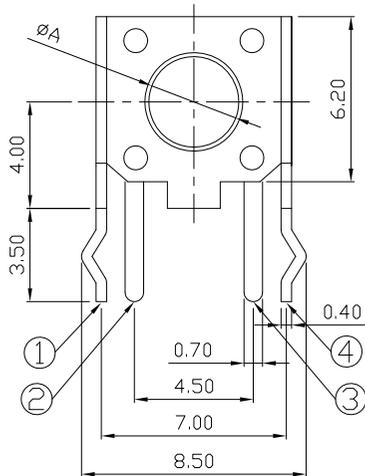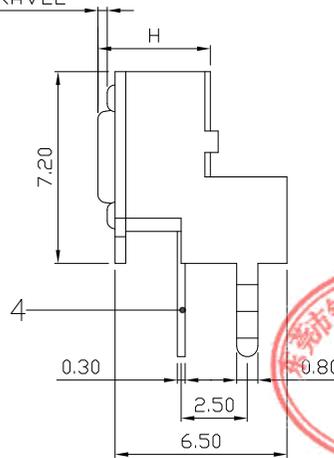

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Travel	0.25±0.1mm
Operating Force	100/130/160±50gf 250/320±100gf
Operating Life(cycles)	100,000



NO.	PARTS	MATERIAL	Q'TY	FINISHING	
5	CONTACT	PBS C5210R-EH	1	Ag CLAD	WITHIN 1.5mm:±0.1mm
4	TERMINAL	BRASS STRIP	2	Ag PLATED	OVER 1.5mm:±0.2mm
3	KNOB	PBT+F.G/NYLON+F.G	1	BLACK	
2	CASE	PBT+F.G/NYLON+F.G	1	BLACK	
1	FRAME	STEEL STRIP	1	Ni PLATED	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	东莞市铀高电子制品有限公司			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE:	PART NO.:		
Q'TY		TACT SWITCH	YT-1102L		
		DR: Ricky 2017/08/03	DWG NO.:		
		CHKD: Ricky 2017/08/03	AZJ-1102L		
		APPD:	SCALE	SHEET	REV.
			4:1	1/1	A
			CUSTOMER DRAWING		