




RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

### DIMENSIONS

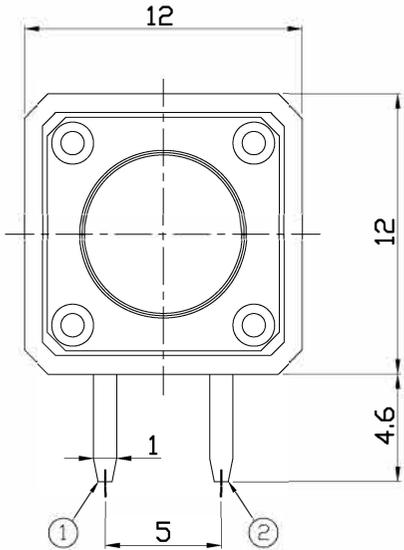

### CIRCUIT DIAGRAM



### PRODUCT IMAGE





### MODEL CODE

YT-1103V

H	ØA
4.3	6.8
5.0	6.8
5.5	6.8
6.0	6.7
6.5	6.7
7.0	6.7
7.5	6.7
8.0	6.6
8.5	6.6
9.0	6.6
9.5	6.6
10.0	6.0
10.5	6.0
11.0	6.0
11.5	6.0
12.0	6.0

### P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

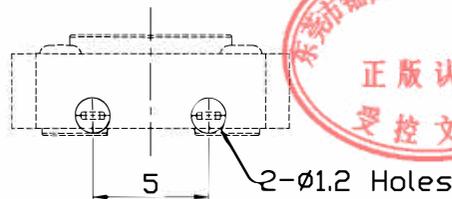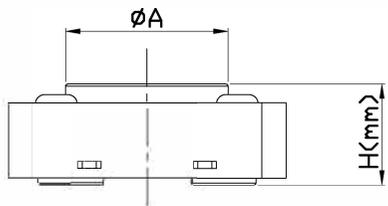

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.3 ± 0.1mm	
Operating Force	130,160±30gf	250±50gf
Operating Life(cycles)	100,000	

.X ±0.3

X. ±2\*

UNI TS mm

MAT'L

SEE NOTE

FIN SH

SEE NOTE

Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



东莞市铀高电子制品有限公司

TITLE  
TACT SWITCH

PART NO.:

YT-1103V

DR: Ricky 2014/03/27

DWG NO.:

CHKD: Ricky 2014/03/27

APPD:

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	A	