



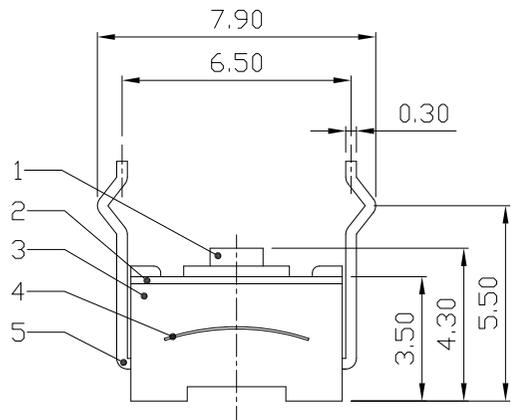



RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.


### DIMENSIONS

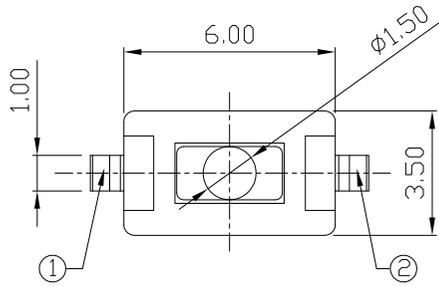

### CIRCUIT DIAGRAM

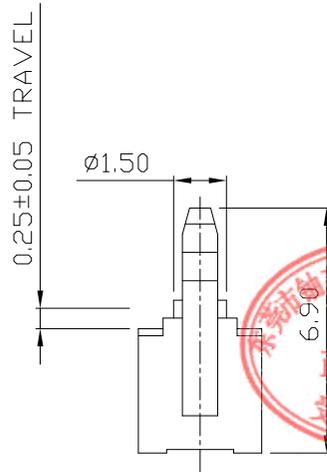

### P.C.B MOUNTING PATTERN DIMENSION

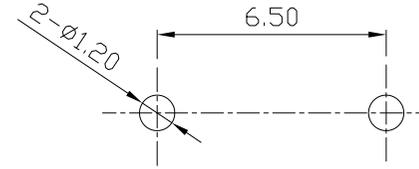

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	0.25±0.05		
Operating Force	180±50gf	250±100gf	
Operating Life(cycles)	30,000		

NO.	PARTS	MATERIAL	Q'TY	FINISHING
5	TERMINAL	BRASS	2	Ag PLATED OVER Ni PLATED
4	CONTACT	SUS	1	Ag CALD
3	CASE	NYLON+F.G	1	BLACK
2	COVER	SUS	1	WASHING
1	KNOB	NYLON+F.G	1	BLACK/WHITE

WITHIN 1.5mm:±0.1mm	UNITS mm
OVER 1.5mm:±0.2mm	MAT'L SEE NOTE
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	FINISH SEE NOTE
	Q'TY

SEE NOTE
SEE NOTE
SEE NOTE

东莞市铀高电子制品有限公司			
TITLE: TACT SWITCH	PART NO.: YT-1101UTB		
DR: Ricky 2017/08/01	DWG NO.: AZJ-1101UTB		
CHKD: Ricky 2017/08/01	SCALE: 4:1	SHEET: 1/1	REV: A
APPD:	CUSTOMER DRAWING		