




REV.	ECN.	NO.	APPD.

MODEL CODE




AT-1103-

H	ϕA
4.3	6.8
5.0	6.8
5.5	6.8
6.0	6.8
6.5	6.7
7.0	6.7
7.5	6.7
8.0	6.7
8.5	6.6
9.0	6.6
9.5	6.6
10.0	6.0
10.5	6.0
11.0	6.0
11.5	6.0
12.0	6.0

The following soldering patterns are recommended for reflow soldering

Refer to additional specifications

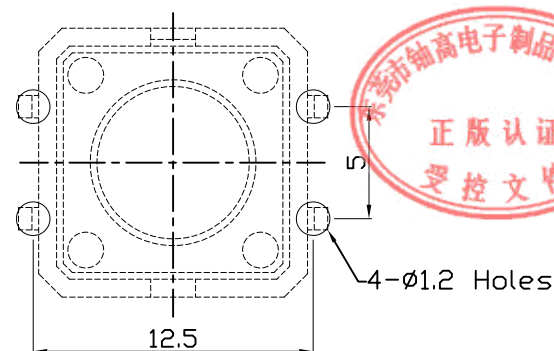

Rating	DC 12V 50mA	
Contact Resistance	100m Ω Max.	
Travel	0.3 $\pm$ 0.1mm	
Operating Force	130,160 $\pm$ 30gf	250 $\pm$ 50gf
Operating Life(cycles)	100,000	

.X ±0.3	X. ±2°	UNITS mm	东莞市铀高电子产品有限公司						
		MAT'L							
		SEE NOTE	TITLE: TACT SWITCH		PART NO.: YT-1103A				
		FINISH	DR: Ricky 2014/03/27		DWG NO.: ASI-1103				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	CHKD: Ricky 2014/03/27		SCALE		SHEET	REV.	CUSTOMER DRAWING
		Q'TY	APPD:		1:1		1/1	A	