



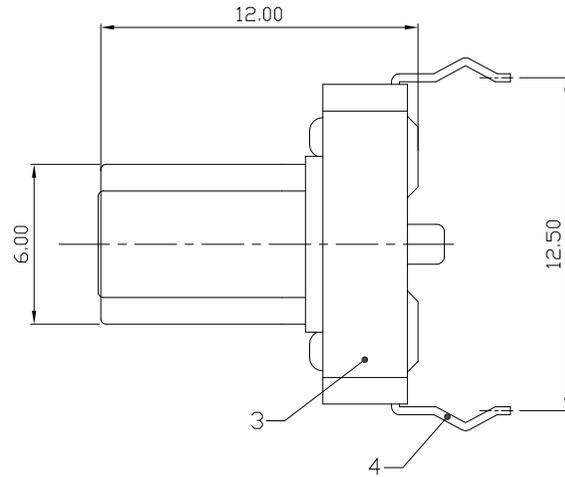



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

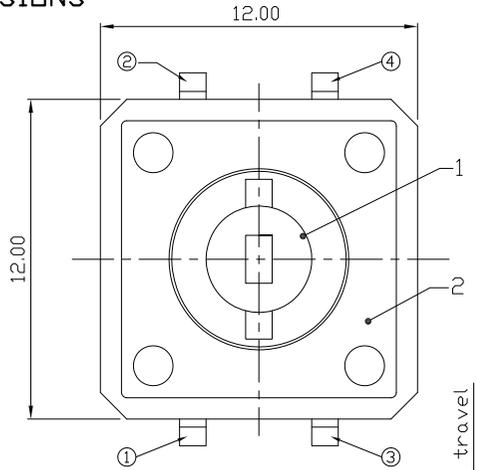

CIRCUIT DIAGRAM

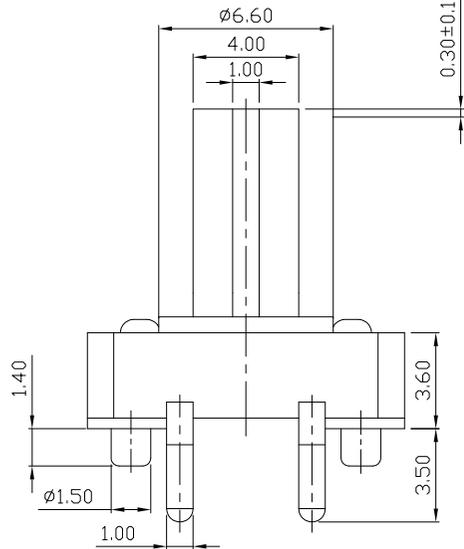

P.C.B MOUNTING PATTERN DIMENSION

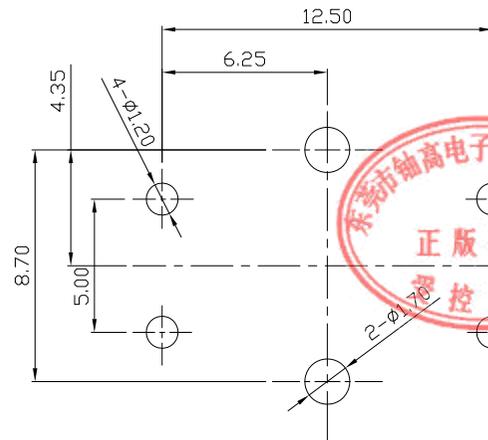

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.30±0.15mm	
Operating Force	160±50gf	250±100gf
Operating Life(cycles)	100,000	

NO.	PARTS	MATERIAL	Q'TY	FINISHING		UNITS
5	SPRING PLATE	PBS	1	Ag CALD	WITHIN 1.5mm:±0.1mm	mm
4	TERMINAL	BRASS STRIP	1	Ag COATING	OVER 1.5mm:±0.2mm	MAT'L
3	CASE	NYLON+F.G	1	BLACK		SEE NOTE
2	COVER	MILD STEEL	1	Ni COATING		FINISH
1	KNOB	NYLON+F.G	1	NATURAL		SEE NOTE
						Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司			
TITLE:	TACT SWITCH		
PART NO.:	YT-1103E		
DR:	Ricky 2017/08/02	DWG NO.:	AZJ-1103EA
CHKD:	Ricky 2017/08/02	SCALE	4:1
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER	DRAWING