





RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	NO.	APPD.


### DIMENSIONS

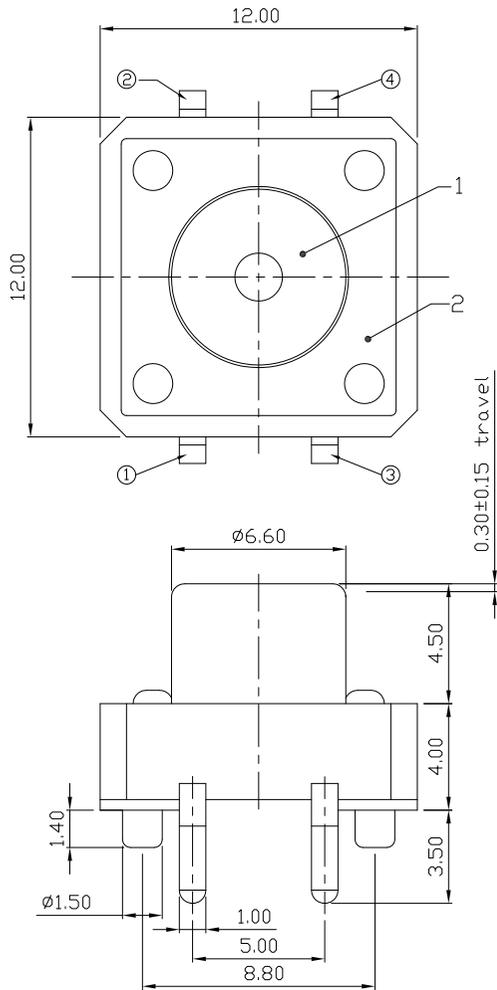

### CIRCUIT DIAGRAM



### P.C.B MOUNTING PATTERN DIMENSION

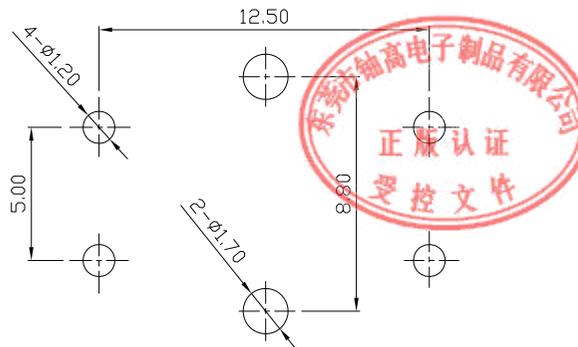

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.30±0.15mm	
Operating Force	160±50gf	250±100gf
Operating Life(cycles)	100,000	

NO.	PARTS	MATERIAL	Q'TY	FINISHING	
5	SPRING PLATE	PBS	1	Ag CALD	WITHIN 1.5mm:±0.1mm
4	TERMINAL	BRASS STRIP	4	Ag COATING	OVER 1.5mm:±0.2mm
3	CASE	NYLON+F.G	1	BLACK	
2	COVER	MILD STEEL	1	Ni COATING	
1	KNOB	NYLON+F.G	1	BLACK	

UNITS mm				东莞市铀高电子制品有限公司			
SEE NOTE		MAT'L		TITLE:		PART NO.:	
SEE NOTE		FINISH		TACT SWITCH		YT-1103E-8.5	
SEE NOTE		Q'TY		DR: Ricky 2017/08/02		DWG NO.:	
				CHKD: Ricky 2017/08/02		AZJ-1103E-8.5	
				APPD:		SCALE	SHEET
						4:1	1/1
						REV.	CUSTOMER
						A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

