





RoHS
Compliant
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
| | | | |
| | | | |
| | | | |


DIMENSIONS

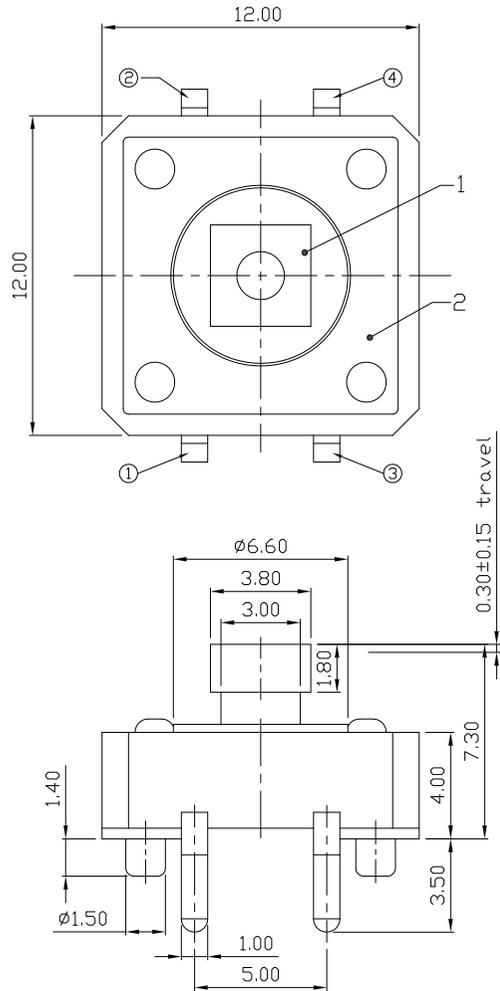

CIRCUIT DIAGRAM



P.C.B MOUNTING PATTERN DIMENSION

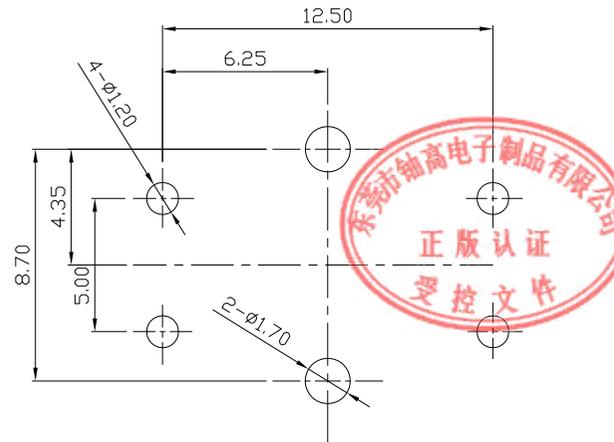

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

| | | |
|------------------------|-------------|-----------|
| Rating | DC 12V 50mA | |
| Contact Resistance | 100mΩ Max. | |
| Travel | 0.30±0.15mm | |
| Operating Force | 160±50gf | 250±100gf |
| Operating Life(cycles) | 100,000 | |

| NO. | PARTS | MATERIAL | Q'TY | FINISHING | |
|-----|----------|-------------|------|------------|---------------------|
| 5 | CONTACT | PBS | 1 | Ag CALD | WITHIN 1.5mm:±0.1mm |
| 4 | TERMINAL | BRASS STRIP | 4 | Ag COATING | OVER 1.5mm:±0.2mm |
| 3 | CASE | PPS | 1 | BLACK | |
| 2 | COVER | MILD STEEL | 1 | Ni COATING | |
| 1 | KNOB | NYLON+F.G | 1 | BLACK | |
| | | | | | |

| UNITS | | | | mm | | | |
|----------|--|--|--|--------|--|--|--|
| SEE NOTE | | | | MAT'L | | | |
| SEE NOTE | | | | FINISH | | | |
| SEE NOTE | | | | Q'TY | | | |
| | | | | | | | |

| 东莞市铀高电子制品有限公司 | | | | | | | |
|------------------------|-------|------|----------|---------------------|--|--|--|
| TITLE: TACT SWITCH | | | | PART NO.: YT-1103ET | | | |
| DR: Ricky 2017/08/02 | | | | DWG NO.: AZJ-1103ET | | | |
| CHKD: Ricky 2017/08/02 | | | | | | | |
| APPD: | | | | | | | |
| SCALE | SHEET | REV. | CUSTOMER | DRAWING | | | |
| 4:1 | 1/1 | A | | | | | |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.