





RoHS Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

DIMENSIONS

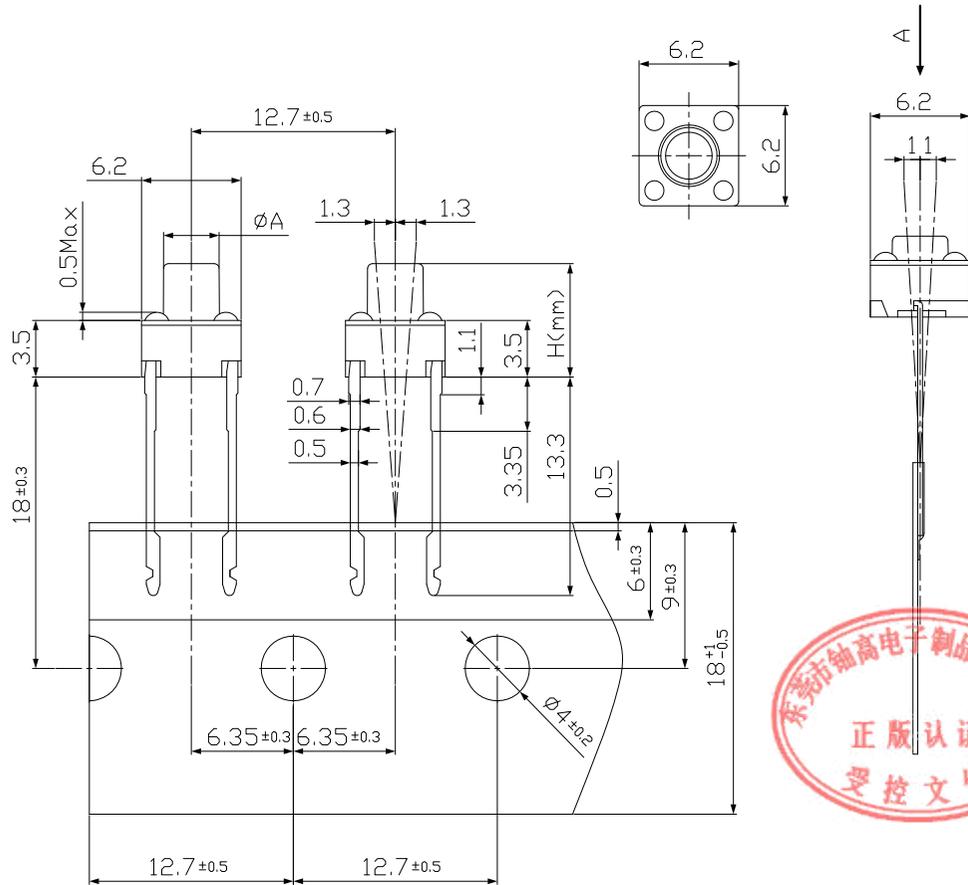

CIRCUIT DIAGRAM



PRODUCT IMAGE




MODEL CODE

YT-1104RT

	H	∅A
-	4.3	3.4
AS	4.5	3.4
A	5.0	3.4
AL	5.5	3.3
Q	6.0	3.3
QL	6.5	3.3
B	7.0	3.3
E	7.3	3.3
EL	7.5	3.3
C	8.0	3.3
CL	8.5	3.3
DS	9.0	3.3
D	9.5	3.3
DL	10.0	3.0
KS	10.5	3.0
K	11.0	3.0
KL	11.5	3.0
FS	12.0	3.0
F	12.5	3.0
FL	13.0	3.0
G	13.5	3.0
D	14.0	3.0
X	14.5	3.0
Y	15.0	3.0
Z	16.0	3.0
J	16.3	3.0
I	17.0	3.0

PCB HOLE DETAILS



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25 ± 0.1mm	
Operating Force	100,130,160±30gf	250±50gf
Operating Life(cycles)	100,000	



.X ±0.3	X. ±2'	UNITS mm	东莞市铀高电子制品有限公司				
		MAT'L					
		SEE NOTE	TITLE: TACT SWITCH	PART NO.: YT-1104RT			
		FINISH	DR: Ricky 2015/03/18	DWG NO.: ASI-1104RT			
		SEE NOTE	CHKD: Ricky 2015/03/18	SCALE	SHEET	REV.	
		Q'TY	APPD:	1:1	1/1	A	CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.