




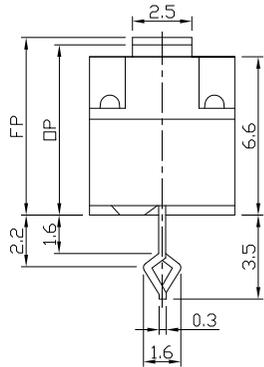




RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

### DIMENSIONS



### Structure chart



### 1.Functional spec

1.1 Rated Voltage	DC30V
1.2 Rated Current	50mA
1.3 Contact Resistance	≤100mΩ(Initial value)
1.4 Operating Force	70±20gf
1.5 Bounce Time	
1.6 Free Position	7.35±0.2mm
1.7 Operating Position	7.0±0.2mm
1.8 Position Travel	
1.9 Return Force	

### 2.Reliable Rating

2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	1,000,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC250V
2.4 Withstand Voltage	AC600V 1 minute
2.5 Soldering Technic	Hand/Reflow soldering
2.6 Operating Temper	-20°C ~ +70°C
2.7 Ambient Humidity Used	<85%RH

### Material list

NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7				
6	Thimble	RUBBER	1	
5	Terminal	C2680	2	
4	Base	Nylon	1	
3	Spring Plate	SUS301	1	
2	Case	Nylon	1	
1	Button	Nylon	1	

Tolerance:±0.2  
UNITS mm  
MATERIAL SEE NOTE  
FINISH SEE NOTE  
Q'TY  
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm				东莞市铀高电子制品有限公司			
MATERIAL SEE NOTE							
FINISH SEE NOTE				TITLE: TACT SWITCH		PART NO: YT-2700TJ	
Q'TY				DR: Ricky 2017/7/20		DWG NO: ATD-2700TJ-70G	
				CHKD: Ricky 2017/7/20		SCALE SHEET REV. CUSTOMER DRAWING	
				APPD:		1:1 1/1 A	