



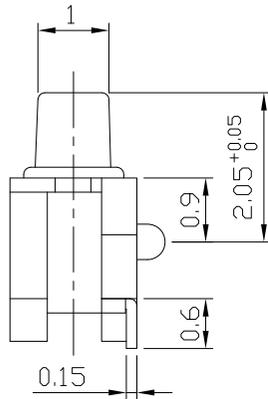


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

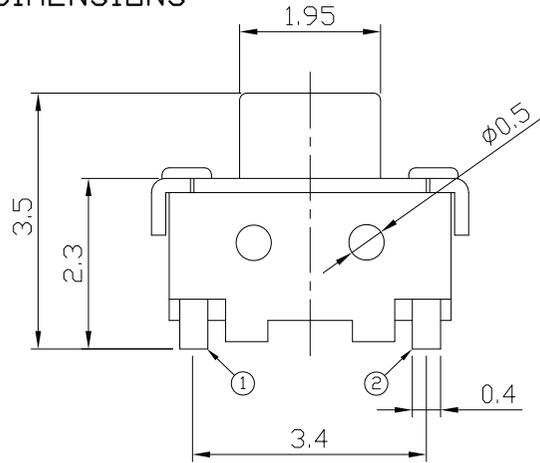

CIRCUIT DIAGRAM





PRODUCT IMAGE



P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

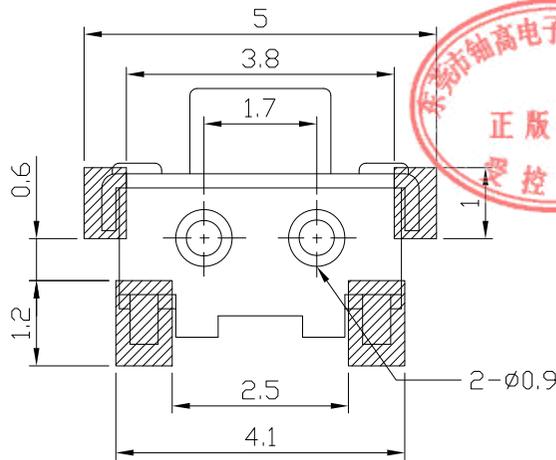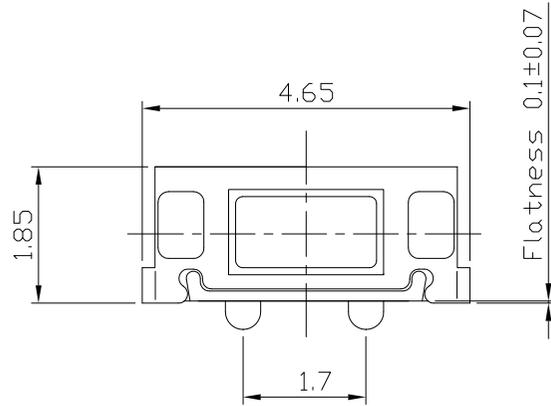

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Contact Resistance	100m Ω Max.
Travel	0.15 \pm 0.1mm
Operating Force	160 \pm 50gf
Operating Life(cycles)	100,000

.X ± 0.2 X. $\pm 2'$

UNITS mm


MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司

TITLE:
TACT SWITCH

PART NO.:

YT-1100AAEP

DR: Ricky 2015/03/18

DWG NO.:
ASI-1100AAEP

CHKD: Ricky 2015/03/18

APPD:

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	A	