






RoHS Compliant
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
| | | | |
| | | | |


DIMENSIONS

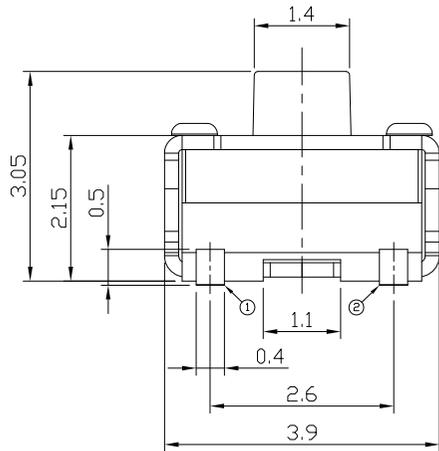

CIRCUIT DIAGRAM





PRODUCT IMAGE



P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

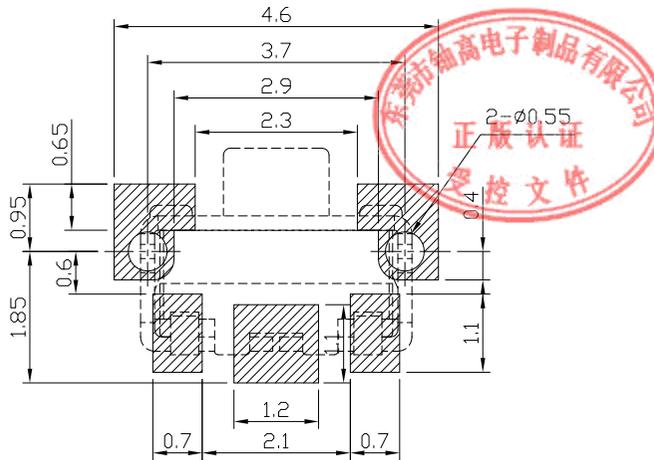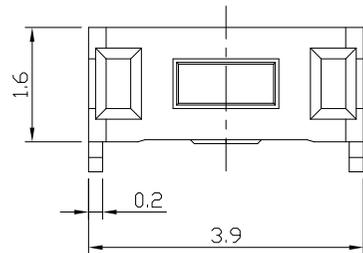

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

| | |
|------------------------|--------------|
| Rating | DC 12V 50mA |
| Contact Resistance | 100mΩ Max. |
| Travel | 0.15 ± 0.1mm |
| Operating Force | 160±50gf |
| Operating Life(cycles) | 100,000 |

.X ±0.2 X. ±2'

UNITS mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司

TITLE: TACT SWITCH

PART NO.: YT-1179GS

DR: Ricky 2018/05/11

DWG NO.: ASI-1179GS

CHKD: Ricky 2018/05/11

APPD:

| | | | |
|-------|-------|------|----------|
| SCALE | SHEET | REV. | CUSTOMER |
| 1:1 | 1/1 | B | DRAWING |