





RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.


DIMENSIONS

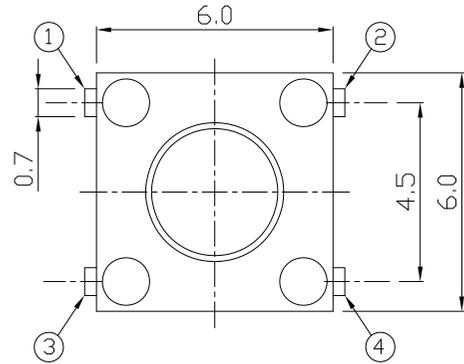

P.C.B MOUNTING PATTERN DIMENSION

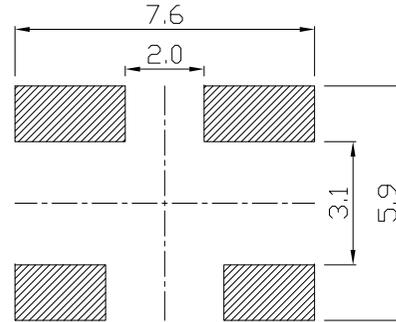


CIRCUIT DIAGRAM



MODEL CODE


YT-1102SJ

	H
-	4.3
A	5.0
Q	6.0
B	7.0
E	7.3
C	8.0
CL	8.5
D	9.5
F	12.5
FL	13.0
I	17.0

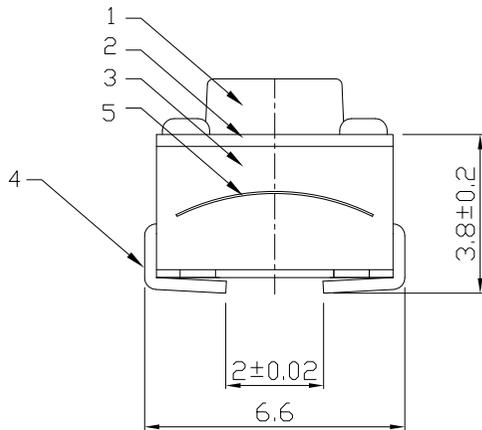

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

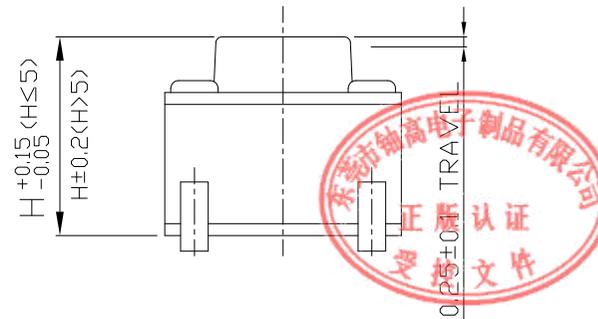

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	0.25±0.1mm		
Operating Force	100±50gf	130±50gf	160±50gf
	250±100gf	320±100gf	
Operating Life(cycles)	100,000		

NO.	PART NAME	MATERIAL	QTY.	FINISHING
5	CONTACT	PBS/SUS	1	Ag CLAD
4	TERMINAL	BRASS STRIP	4	Ag PLATED
3	CASE	NYLON+F.G	1	BLACK
2	COVER	MILD STEEL	1	NI PLATED
1	KNOB	NYLON+F.G	1	BLACK

WITHIN 1.5mm ±0.1	UNITS mm
OVER 1.5mm ±0.2	
	MAT'L
	SEE NOTE
	FINISH
	SEE NOTE
	Q'TY

东莞市铀高电子制品有限公司			
TITLE:	TACT SWITCH	PART NO.:	YT-1102SJ
DR:	Ricky 2017/09/19	DWG NO.:	AZJ-1102SJ
CHKD:	Ricky 2017/09/19	SCALE	8:1
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER DRAWING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

