





RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

### DIMENSIONS

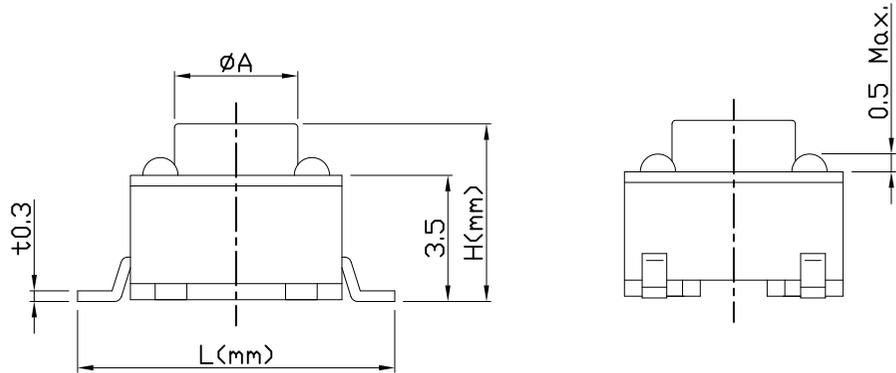

### CIRCUIT DIAGRAM



### PRODUCT IMAGE





### MODEL CODE

YT-1102W8

	H	φA	L
-	4.3	3.5	8
AS	4.5	3.5	9
A	5.0	3.5	
AL	5.5	3.4	
Q	6.0	3.4	
QL	6.5	3.4	
B	7.0	3.4	
E	7.3	3.4	
EL	7.5	3.4	
C	8.0	3.4	
CL	8.5	3.4	
DS	9.0	3.4	
D	9.5	3.4	
DL	10.0	3.0	
KS	10.5	3.0	
K	11.0	3.0	
KL	11.5	3.0	
FS	12.0	3.0	
F	12.5	3.0	
FL	13.0	3.0	
G	13.5	3.0	
□	14.0	3.0	
X	14.5	3.0	
Y	15.0	3.0	
Z	16.0	3.0	
J	16.3	3.0	
I	17.0	3.0	
T	□2.4X2.4		
TA	□2.8X2.8		

### P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

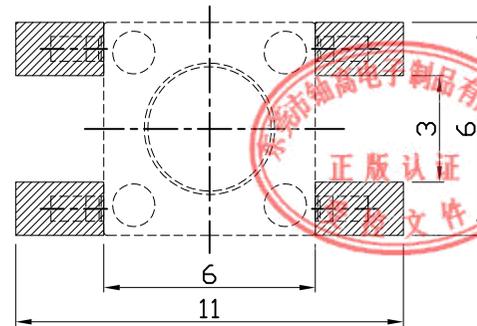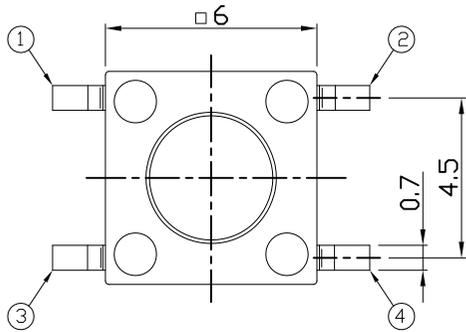

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25 ± 0.1mm	
Operating Force	100,130,160±30gf	250±50gf
Operating Life(cycles)	100,000	Phosphor Bronze
	200,000	Stainless Steel

.X ±0.3	X. ±2'	UNITS	mm	东莞市铀高电子制品有限公司			
		MAT'L					
		SEE NOTE		TITLE:	PART NO.:		
		FINISH		TACT SWITCH	YT-1102W8		
		SEE NOTE		DR:	DWG NO.:		
		Q'TY		Ricky 2014/03/25	1:1		
				CHKD:	REV.:		
				Ricky 2014/03/25	A		
				APPD:	CUSTOMER DRAWING		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

