






RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

### DIMENSIONS

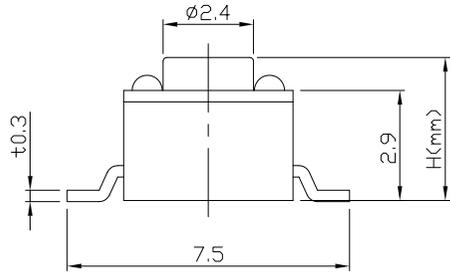

### CIRCUIT DIAGRAM




### PRODUCT IMAGE



### MODEL CODE


YT-1109S -

	H
-	3.8
A	7.0
B	4.8

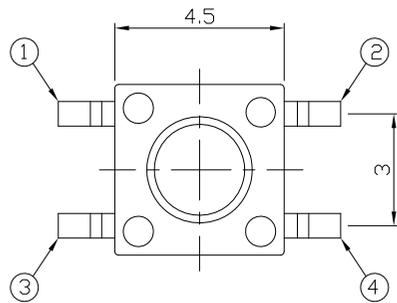

### P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

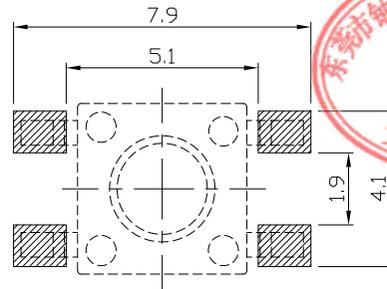

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25 ± 0.1mm	
Operating Force	160±30gf	250±50gf
Operating Life(cycles)	100,000	

.X ±0.3	X. ±2'
UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	SEE NOTE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS				mm			
MATERIAL				SEE NOTE			
FINISH				SEE NOTE			
QTY				SEE NOTE			
UNITS				mm			
MATERIAL				SEE NOTE			
FINISH				SEE NOTE			
QTY				SEE NOTE			

东莞市铀高电子制品有限公司			
TITLE: TACT SWITCH		PART NO.: YT-1109S	
DR: Ricky 2014/03/28		DWG NO.: ASI-1109S	
CHKD: Ricky 2014/03/28		SCALE	
APPD:		SHEET	REV.
1:1		1/1	A
CUSTOMER DRAWING			