





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

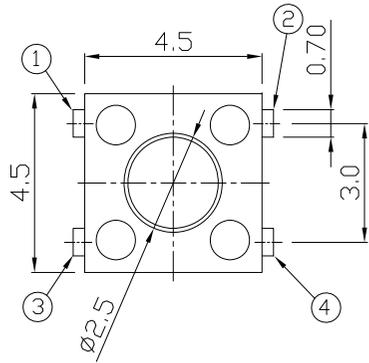

P.C.B MOUNTING PATTERN DIMENSION





CIRCUIT DIAGRAM



MODEL CODE

YT-1109U

	H
-	3.8
C	5.0

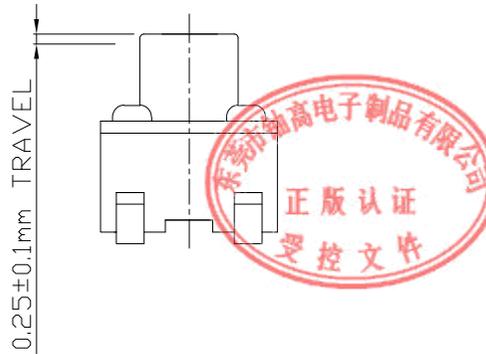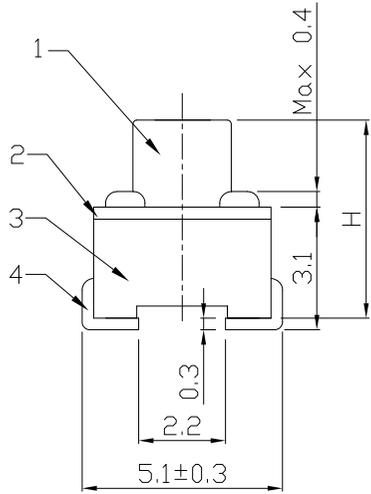

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25±0.1mm	
Operating Force	160±50gf	250±100gf
Operating Life(cycles)	100,000	

NO.	PART NAME	MATERIAL	QTY.	FINISHING		UNITS	东莞市铀高电子制品有限公司									
5	CONTACT	PBS/SUS	1	Ag CLAD	WITHIN 1.5mm ±0.1	mm										
4	TERMINAL	BRASS STRIP	4	Ag PLATED	OVER 1.5mm ±0.2	MAT'L										
3	CASE	NYLON	1	BLACK		SEE NOTE	TITLE:	TACT SWITCH			PART NO.:	YT-1109U				
2	COVER	MILD STEEL	1	NI PLATED		FINISH	DR:	Ricky 2017/09/19			DWG NO.:	AZJ-1109U				
1	KNOB	NYLON	1	WHITE/BLACK		SEE NOTE	CHKD:	Ricky 2017/09/19			SCALE	5:1				
						Q'TY	APPD:				SHEET	1/1	REV.	A	CUSTOMER	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

