






RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.


### DIMENSIONS

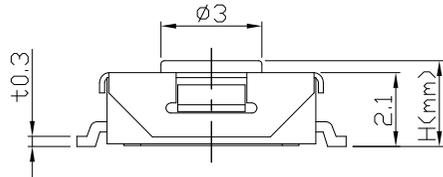

### CIRCUIT DIAGRAM




### PRODUCT IMAGE



### Knob Length

YT-1157            ND

	L		H
A	8	S	2.5
B	10	B	2.7
		H	3.1
		Q	3.4



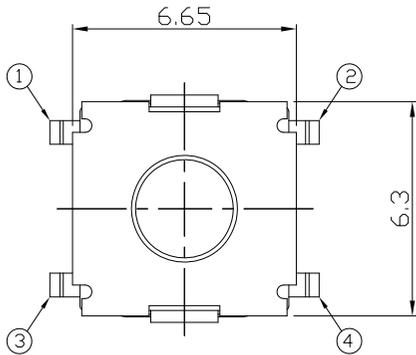


### P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

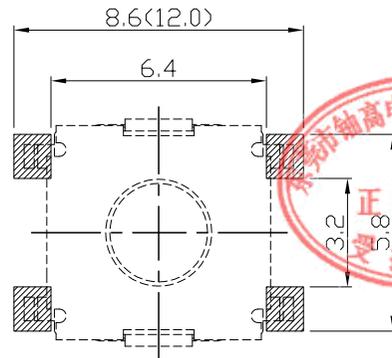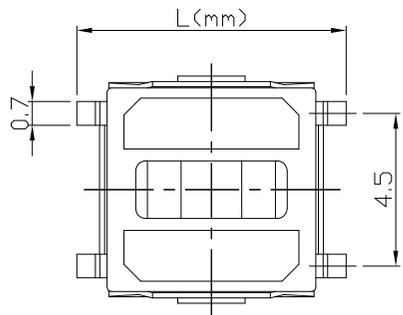

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25 ± 0.1mm	
Operating Force	100,130,160±30gf	250±50gf
Operating Life(cycles)	100,000	Phosphor Bronze
	200,000	Stainless Steel

.X ±0.3	X. ±2'	UNITS	mm				
		MAT'L	SEE NOTE				
		FINISH	SEE NOTE				
		Q'TY	TACT SWITCH		PART NO.: YT-1157		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			DR:	Ricky 2014/03/28	DWG NO.:		
			CHKD:	Ricky 2014/03/28	SCALE	SHEET	REV.
			APPD:	1:1	1/1	A	

东莞市铀高电子制品有限公司

TITLE: TACT SWITCH

PART NO.: YT-1157

DR: Ricky 2014/03/28

DWG NO.:

CHKD: Ricky 2014/03/28

SCALE: 1:1    SHEET: 1/1    REV.: A    CUSTOMER DRAWING