

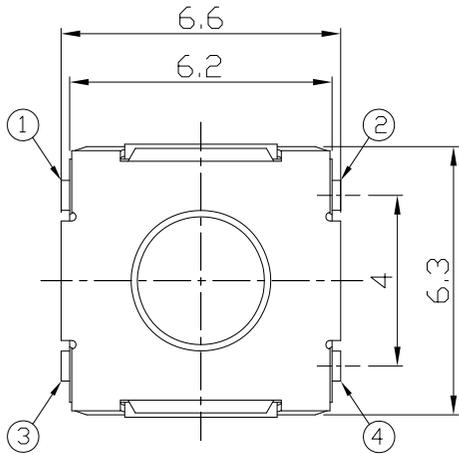




RoHS  
Compliant  
2002/95/EC


REV.	ECN.	NO.	APPD.

### DIMENSIONS

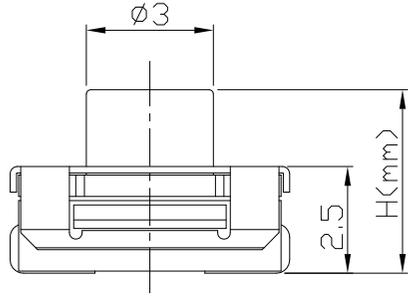


### P.C.B MOUNTING PATTERN DIMENSION


The following soldering patterns are recommended for reflow soldering

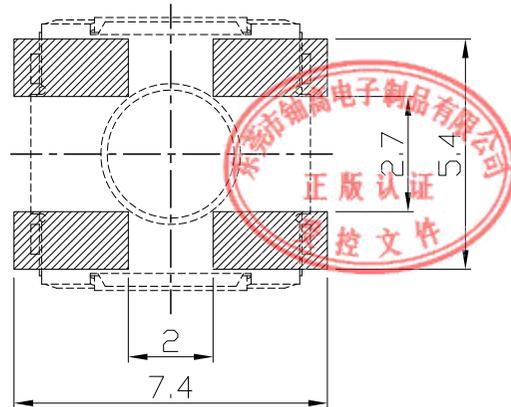

### CIRCUIT DIAGRAM



### PRODUCT IMAGE



### MODEL CODE

YT-1158 -

H	
-	3.4
A	4.0
B	4.3
C	5.0

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.3 ± 0.2mm	
Operating Force	160±50gf	260±50gf
Operating Life(cycles)	100,000	

.X ±0.3	X. ±2*	UNITS mm	东莞市铀高电子制品有限公司			
		MAT'L				
		SEE NOTE	TITLE: TACT SWITCH	PART NO.: YT-1158		
		FINISH	DR: Ricky 2017/04/06	DWG NO.: ASI-1158		
		SEE NOTE	CHKD: Ricky 2017/04/06	SCALE: 1:1	SHEET: 1/1	REV: A
		Q'TY	APPD:	CUSTOMER DRAWING		

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.