








RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

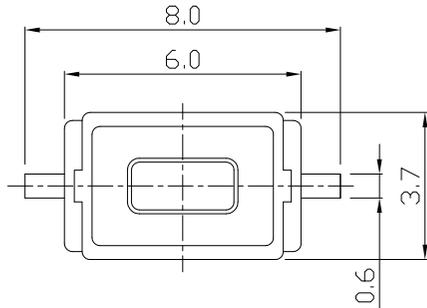

P.C.B MOUNTING PATTERN DIMENSION CIRCUIT DIAGRAM

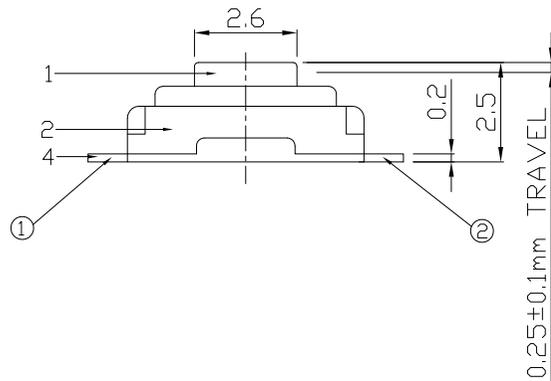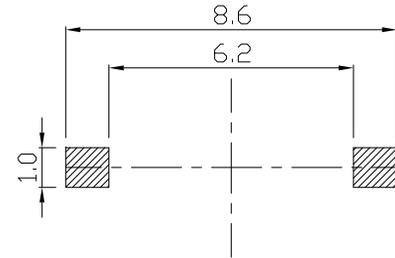

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25±0.1mm	
Operating Force	180±50gf	250±100gf
Operating Life(cycles)	30,000	

6	SEAL PLATE	PET	1	YELLOW	WITHIN 1.5mm ±0.1
5	CONTACT	SUS	1	Ag CLAD	OVER 1.5mm ±0.2
4	TERMINAL	BRASS STRIP	2	Ag COATING	
3	CASE	PA6T	1	WHITE/BLACK	
2	COVER	MILD STEEL	1	Ni PLATED	
1	KNOB	PPA	1	RED/BLACK	
NO.	PART NAME	MATERIAL	QTY.	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	东莞市铀高电子制品有限公司			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE:	PART NO.:		
Q'TY		TACT SWITCH	YT-1181F		
		DR: Ricky 2017/09/21	DWG NO.:		
		CHKD: Ricky 2017/09/21	AZJ-1181F		
		APPD:	SCALE	SHEET	REV.
			8:1	1/1	A
			CUSTOMER DRAWING		