



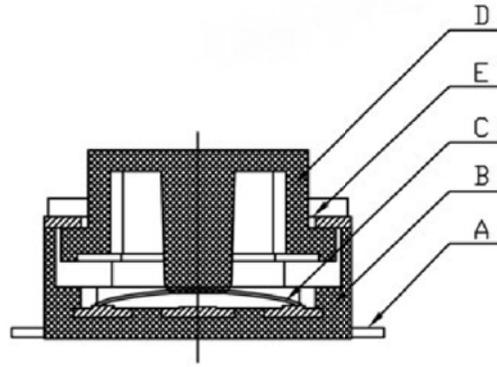

RoHS
Compliant
2002/95/EC





REV.	ECN.	NO.	APPD.

DIMENSIONS

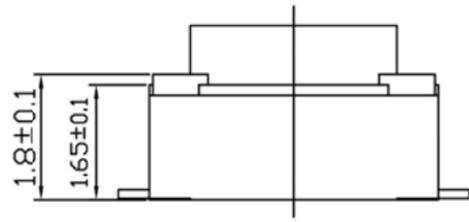

P.C.B MOUNTING PATTERN DIMENSION
The following soldering patterns are recommended for reflow soldering

CIRCUIT DIAGRAM

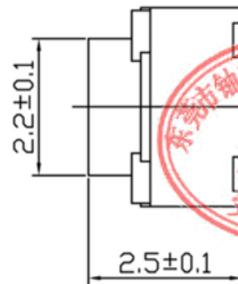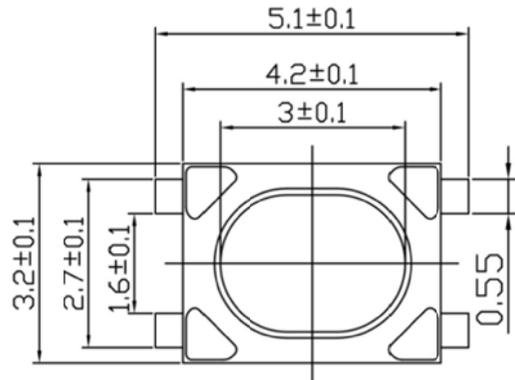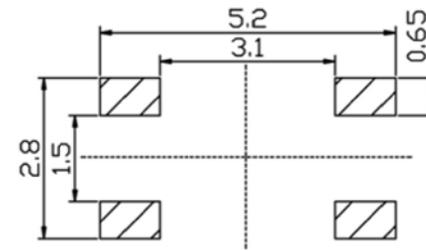

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	0.15 ± 0.1mm		
Operating Force	160±50gf	250±50gf	400±50gf
Operating Life(cycles)	50,000		

Bill of materials:

NO.	PARTS	MATERIAL	Q'TY	FINISHING			UNITS	东莞市铀高电子制品有限公司			
E	COVER	STAINLESS STEEL T=0.15mm	1	WASHING	.X ±0.3	X. ±2'	mm	TITLE: TACT SWITCH PARI NO.: YT-1182F			
D	KNOB	LCP	1	WHITE			MAT'L				
C	CONTACT	STAINLESS STEEL	2	AG PLATED			SEE NOTE	DR: Ricky 2018/06/11 DWG NO.: AKS-1182F			
B	CASE	LCP	1	WHITE			FINISH	SCALE SHEET REV. CUSTOMER			
A	TERMINAL	PHOSPHOR BRONZE T=0.12mm	1	NI/AG PLATED			SEE NOTE	1:1 1/1 A DRAWING			
							Q'TY	APPD: Ricky 2018/06/11			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

