






RoHS
Compliant
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
| | | | |
| | | | |
| | | | |


DIMENSIONS

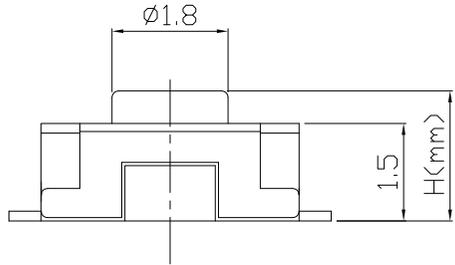

CIRCUIT DIAGRAM



PRODUCT IMAGE





MODEL CODE

YT-1185AP1-

| | |
|---|-----|
| | H |
| - | 1.8 |
| A | 2.0 |
| B | 2.5 |
| D | 7.0 |

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

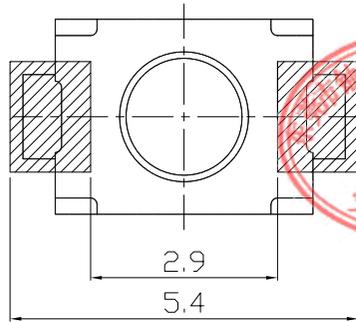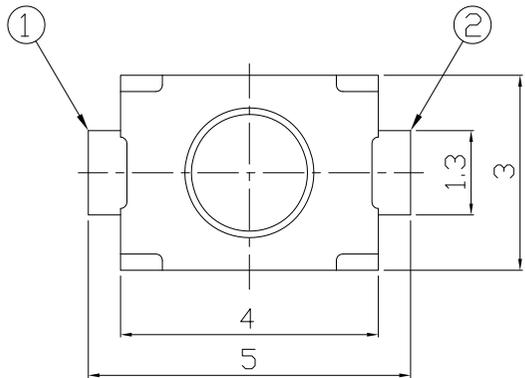

ELECTRO-MECHANICAL CHARACTERISTICS


Refer to additional specifications

| | | |
|------------------------|--------------|----------|
| Rating | DC 12V 50mA | |
| Contact Resistance | 100mΩ Max. | |
| Travel | 0.15 ± 0.1mm | |
| Operating Force | 160±30gf | 250±50gf |
| Operating Life(cycles) | 100,000 | |



| | | | | | | |
|---------|--------|----------|------------------------|--|-------------|----------|
| .X ±0.3 | X. ±2' | UNITS | mm | | | |
| | | MAT'L | | | | |
| | | SEE NOTE | TITLE: | | PART NO.: | |
| | | | TACT SWITCH | | YT-1185AP1 | |
| | | FINISH | DR: Ricky 2014/03/28 | | DWG NO.: | |
| | | SEE NOTE | CHKD: Ricky 2014/03/28 | | ASI-1185AP1 | |
| | | Q'TY | APPD: | | SCALE | SHEET |
| | | | | | 1:1 | 1/1 |
| | | | | | REV. | CUSTOMER |
| | | | | | A | DRAWING |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



东莞市铀高电子制品有限公司