

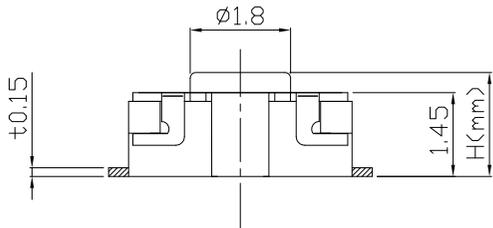


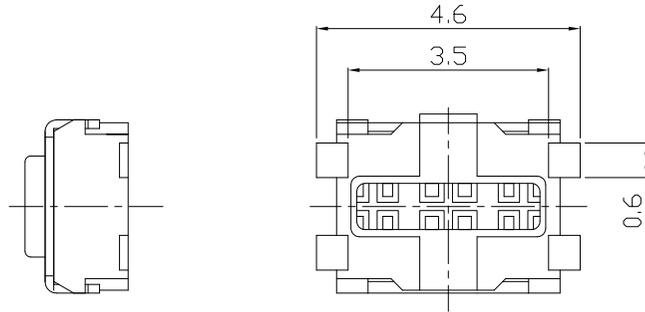

RoHS  
Compliant  
2002/95/EC



REV.	ECN. NO.	APPD.

### DIMENSIONS

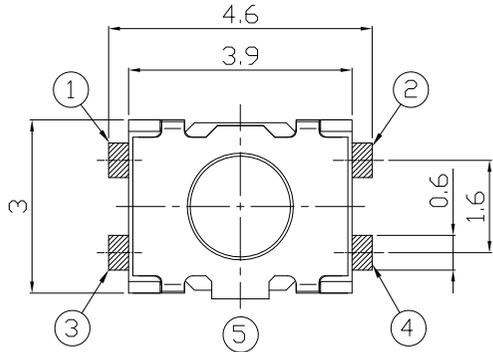


### P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

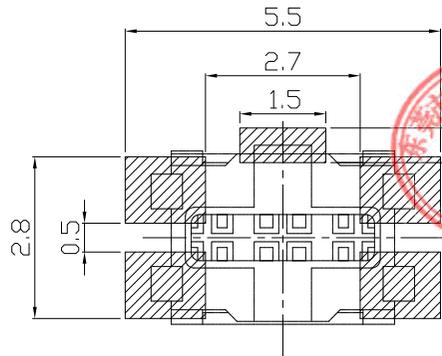

### PRODUCT IMAGE




### MODEL CODE

YT-1185BP1-G -

	H
A	1.8
B	2.0

### CIRCUIT DIAGRAM



### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	0.2 ± 0.1mm		
Operating Force	160±30gf	250±50gf	
Operating Life(cycles)	100,000		

.X ±0.3	X. ±2'
UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	SEE NOTE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS				mm			
MATERIAL				SEE NOTE			
FINISH				SEE NOTE			
QTY				SEE NOTE			
TITLES				PART NO.:			
TACT SWITCH				YT-1185BP1-G			
DR: Ricky 2014/03/31				DWG NO.:			
CHKD: Ricky 2014/03/31				ASI-1185BP1-G			
APPD:				SCALE		SHEET	
				1:1		1/1	
				REV.		CUSTOMER	
				A		DRAWING	

东莞市铀高电子制品有限公司

TITLES  
TACT SWITCH

PART NO.:

YT-1185BP1-G

DR: Ricky 2014/03/31

DWG NO.:

ASI-1185BP1-G

CHKD: Ricky 2014/03/31

SCALE

SHEET

REV.

CUSTOMER

1:1

1/1

A

DRAWING