





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

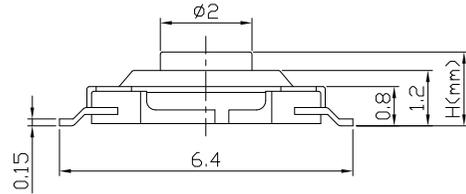


PRODUCT IMAGE



MODEL CODE




YT-1187P -	H	Knob	Color	Material
-	1.5	GD	Gold	Brass
A	4.3	SR	Silver	Brass
B	1.7	WT	White	PolyAmide
C	1.6	GY	Grey	PolyAmide
D	2.3	BK	Black	PolyAmide
E	3.0			

CIRCUIT DIAGRAM



P.C.B MOUNTING PATTERN DIMENSION


The following soldering patterns are recommended for reflow soldering

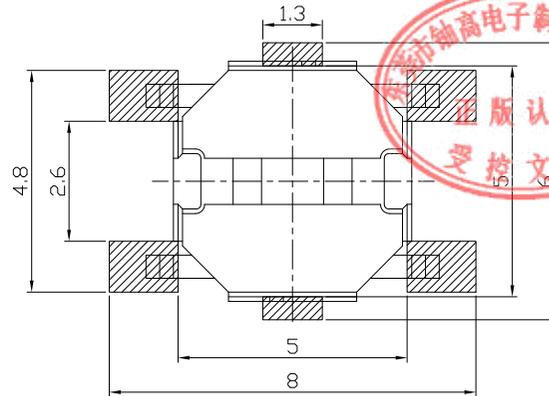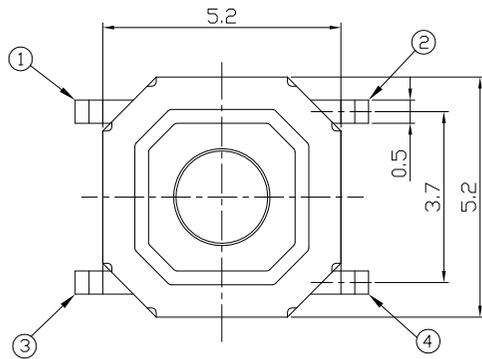

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Travel	0.2 ± 0.05mm
Operating Force	160±30gf 250±50gf
Operating Life(cycles)	100,000



.X ±0.2	X. ±2'	UNITS	mm
		MAT'L	
		SEE NOTE	
		FINISH	
		SEE NOTE	
		Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司			
TITLE: TACT SWITCH		PART NO.: YT-1187P	
DR: Ricky 2014/03/31		DWG NO.: ASI-1187P	
CHKD: Ricky 2014/03/31		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER
		A	DRAWING