



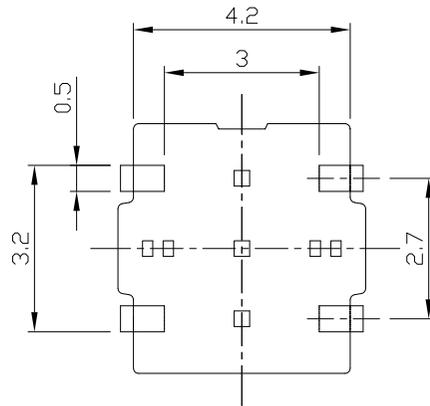


RoHS
Compliant
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
| | | | |
| | | | |
| | | | |


DIMENSIONS

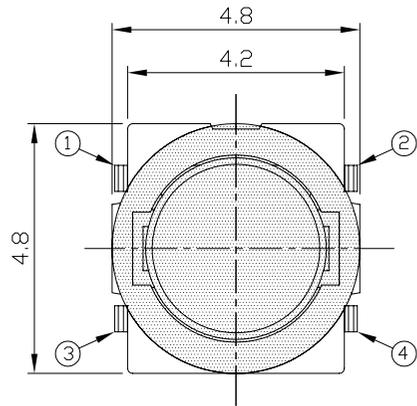

CIRCUIT DIAGRAM






PRODUCT IMAGE



P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

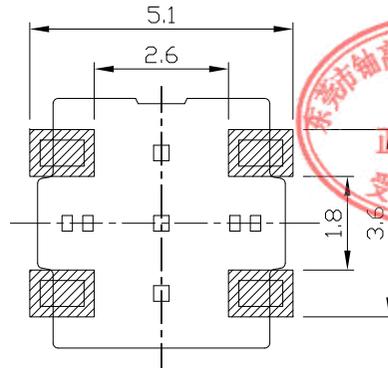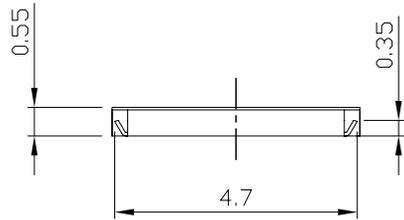

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

| | | | |
|------------------------|-------------|----------|--|
| Rating | DC 12V 50mA | | |
| Contact Resistance | 100mΩ Max. | | |
| Travel | 0.2 ± 0.1mm | | |
| Operating Force | 160±30gf | 250±50gf | |
| Operating Life(cycles) | 100,000 | | |

.X ±0.3

X. ±2'

UNITS

mm

MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY

SEE NOTE

SEE NOTE

SEE NOTE

东莞市铀高电子制品有限公司

TITLE:

TACT SWITCH

PART NO.:

YT-1197A

DR:

Ricky 2014/04/01

DWG NO.:

ASI-1197A

CHKD:

Ricky 2014/04/01

APPD:

SCALE

1:1

SHEET

1/1

REV.

A

CUSTOMER

DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.