





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

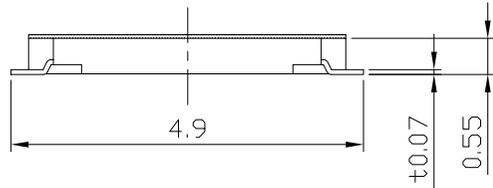

CIRCUIT DIAGRAM





PRODUCT IMAGE

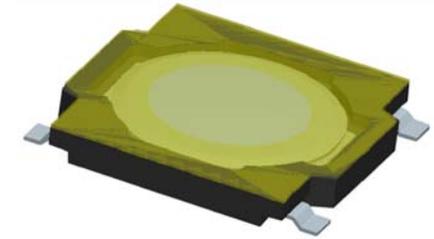

P.C.B MOUNTING PATTERN DIMENSION


The following soldering patterns are recommended for reflow soldering

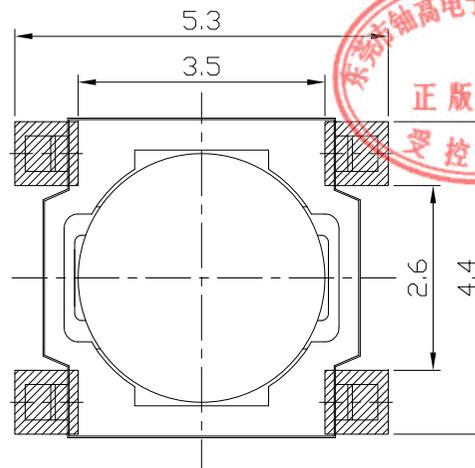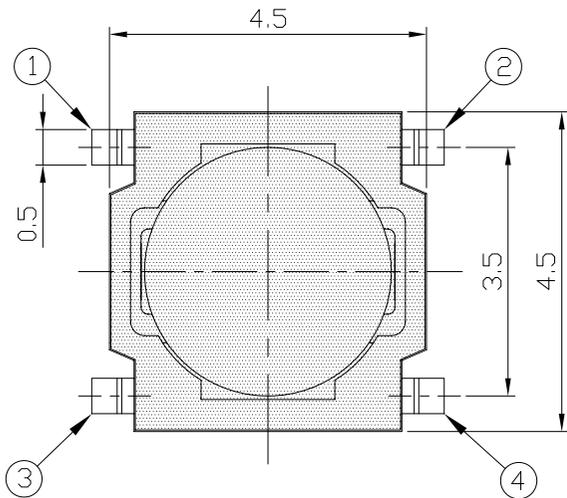

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.2 ± 0.1mm	
Operating Force	160±30gf	250±50gf
Operating Life(cycles)	100,000	



.X ±0.2	X. ±2'	UNITS	东莞市铀高电子制品有限公司			
		mm				
		MAT'L				
		SEE NOTE	TITLE:		PART NO.:	
			TACT SWITCH		YT-1198	
		FINISH	DR: Ricky 2014/04/01		DWG NO.:	
		SEE NOTE	CHKD: Ricky 2014/04/01		ASI-1198	
		Q'TY	APPD:		SCALE	SHEET
					1:1	1/1
					REV.	CUSTOMER
					A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

