




RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

### DIMENSIONS

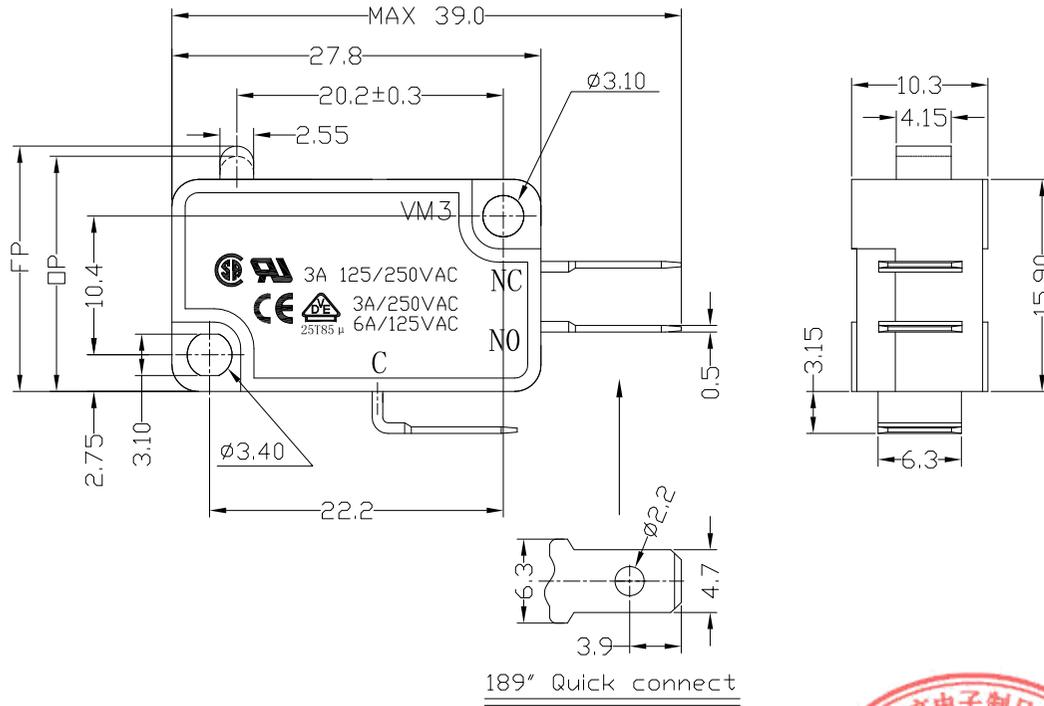

### 1.Functional spec

1.1 Rated Voltage(AC)	125/250VAC
1.2 Rated Current(AC)	3A
1.3 Contact Resistance	≤100mΩ(Initial value)
1.4 Operating Force	110±30gf   160±40gf   250±50gf
1.5 Bounce Time	
1.6 Free Position	18.4±0.5mm
1.7 Operating Position	17.5±0.5mm
1.8 Position Travel	
1.9 Return Force	

### 2.Reliable Rating


2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	10,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V
2.4 Withstand Voltage	AC1500V 1 minute
2.5 Soldering Technic	Hand Soldering
2.6 Operating Temper	-25°C ~ +85°C
2.7 Ambient Humidity Used	<85%RH

### MODEL CODE

VM 3- 00 X-XXS-U56

1 2 3 4 5 6 7

- 1.Series : VM
- 2.Current Rating : 3=3A 125/250VAC
- 3.Actuator : 00=Non-lever 01=Lever
- 4.Termination : see chart (N/K)  
(2=SPST-NO / 16=SPST-NC)
- 5.Operating Force : see chart
- 6.Spring Material:S=SUS304
- 7.Contact type: U56=3Amps Contact



### CIRCUIT DIAGRAM



Tolerance: ±0.2		UNITS	东莞市铀高电子制品有限公司			
		mm				
		MAT'L	SEE NOTE		TITLE:	PART NO.:
		FINISH	SEE NOTE		MICRO SWITCH VM3 SERIES	VM3-00N-XXS-U56
		Q'TY	SEE NOTE		DR: Ricky 2017/5/9	DWG NO.:
					CHKD: Ricky 2017/5/9	ATD-00X-XXS-U56
					APPD:	SCALE SHEET REV. CUSTOMER DRAWING
						1:1 1/2 A


THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.




RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

### Terminal Type

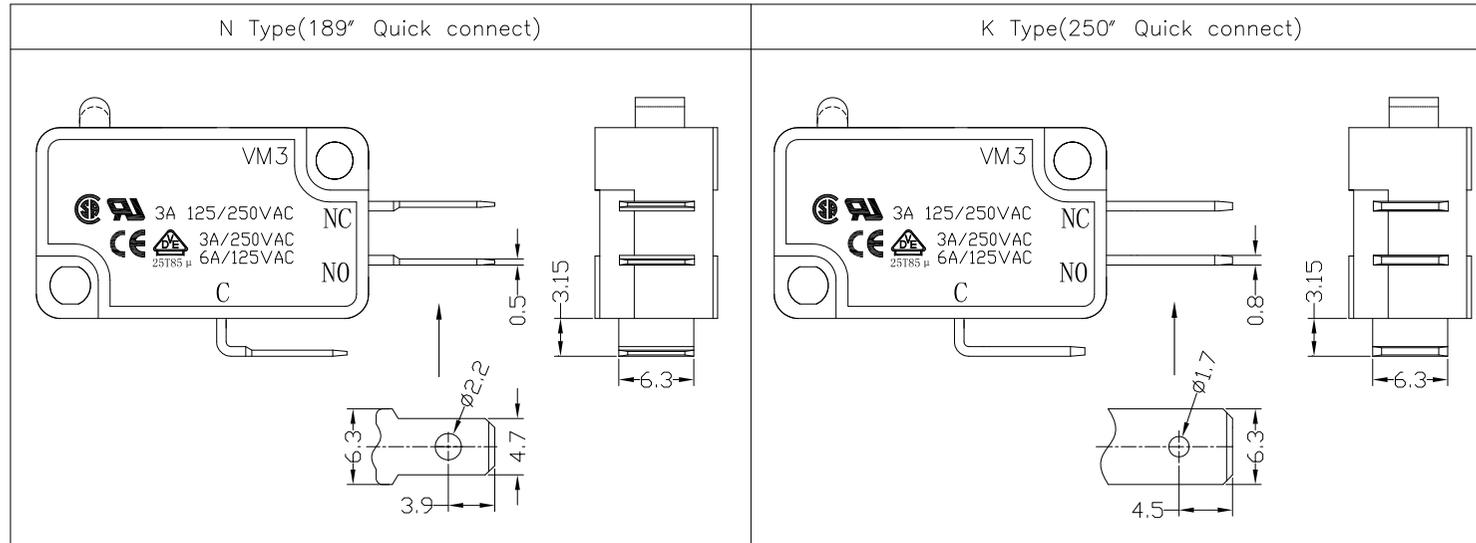

### Structure chart

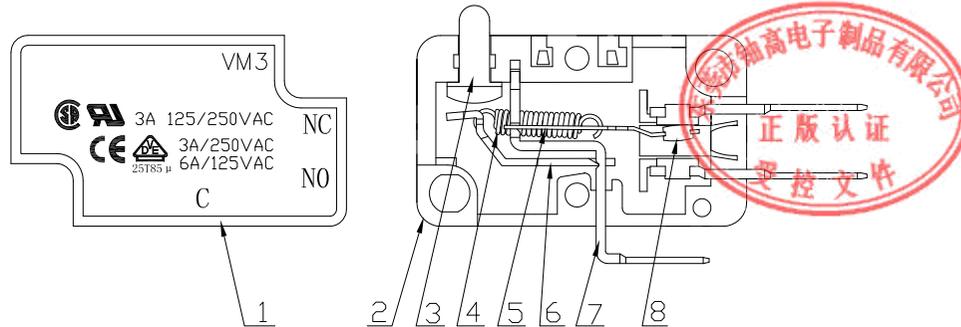

### Material list

NO.	PARTS	MATERIAL	Q'TY	FINISHING	Tolerance:±0.2	UNITS	东莞市铀高电子制品有限公司					
8	Contact	Silver alloy	3		mm	SEE NOTE	TITLE: MICRO SWITCH VM3 SERIES		PART NO.: VM3-00X-XXS-U56			
7	Terminal	C2680	3	Silver Plating			SEE NOTE	DR: Ricky 2017/5/9		DWG NO.: ATD-00X-XXS-U56		
6	Fixed Rod	C2680	1		SEE NOTE	Q'TY		CHKD: Ricky 2017/5/9		SCALE: 1:1	SHEET: 2/2	REV.: A
5	Change Plate	C5210	1				FINISH		APPD:			
4	Spring	SUS304	1		SEE NOTE							
3	Button	PBT	1	Gray								
2	Lower Housing	PBT	1	Black								
1	Upper Housing	PBT	1	Black								
					<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.</small>							







RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

### Terminal Type

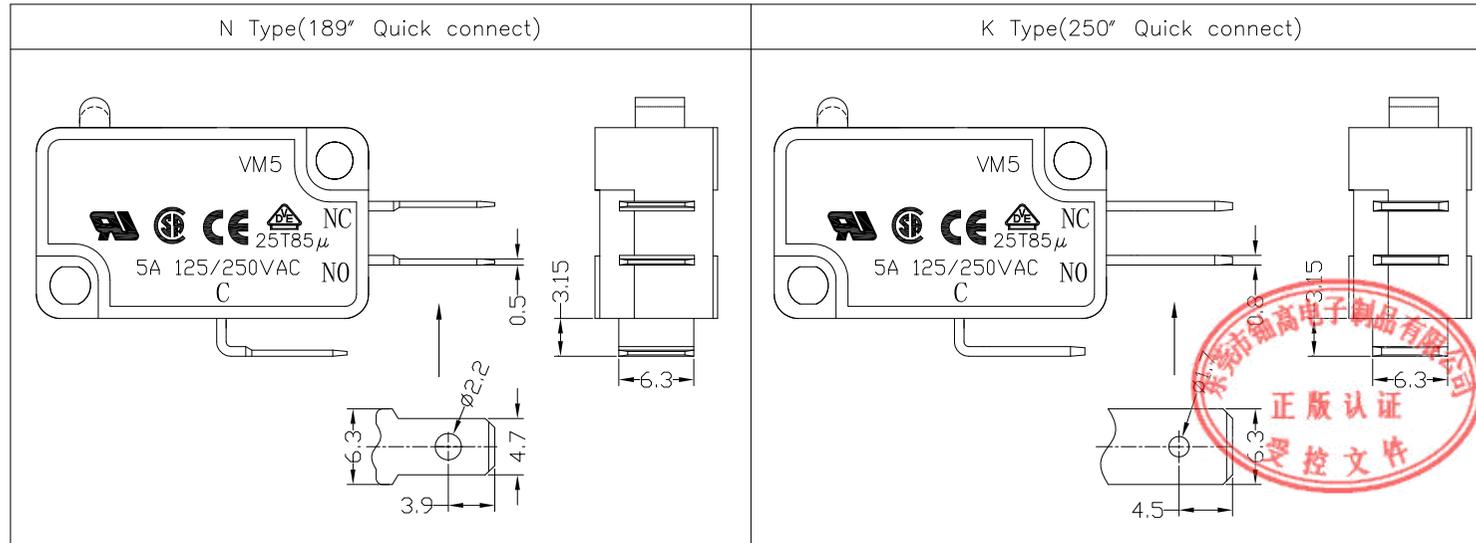

### Structure chart

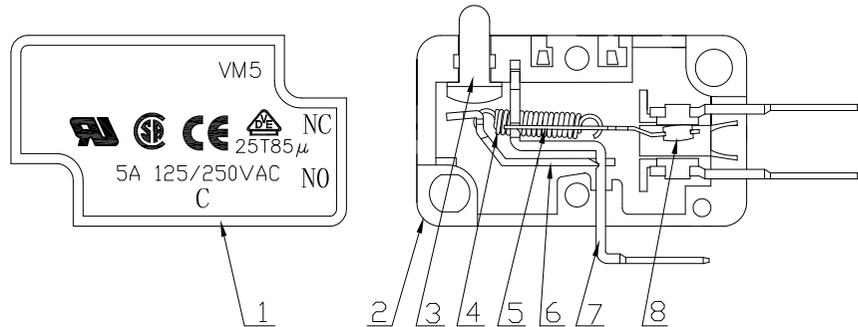

### Material list

NO.	PARTS	MATERIAL	Q'TY	FINISHING	Tolerance: ±0.2	UNITS	东莞市铀高电子制品有限公司					
8	Contact	Silver alloy	3		mm	SEE NOTE	TITLE: MICRO SWITCH VM5 SERIES		PART NO.: VM5-00X-XXS-U10			
7	Terminal	C2680	3	Silver Plating			SEE NOTE	DR: Ricky 2017/5/11		DWG NO.: ATD-00X-XXS-U10		
6	Fixed Rod	C2680	1		SEE NOTE	Q'TY		CHKD: Ricky 2017/5/11		SCALE	SHEET	REV.
5	Change Plate	C5210	1				SEE NOTE	APPD:	1:1		2/2	A
4	Spring	SUS304	1		SEE NOTE	APPD:						
3	Buton	PBT	1	Gray			SEE NOTE	APPD:				
2	Lower Housing	PBT	1	Black	SEE NOTE	APPD:						
1	Upper Housing	PBT	1	Black			SEE NOTE	APPD:				
8	Contact	Silver alloy	3									

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

