




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

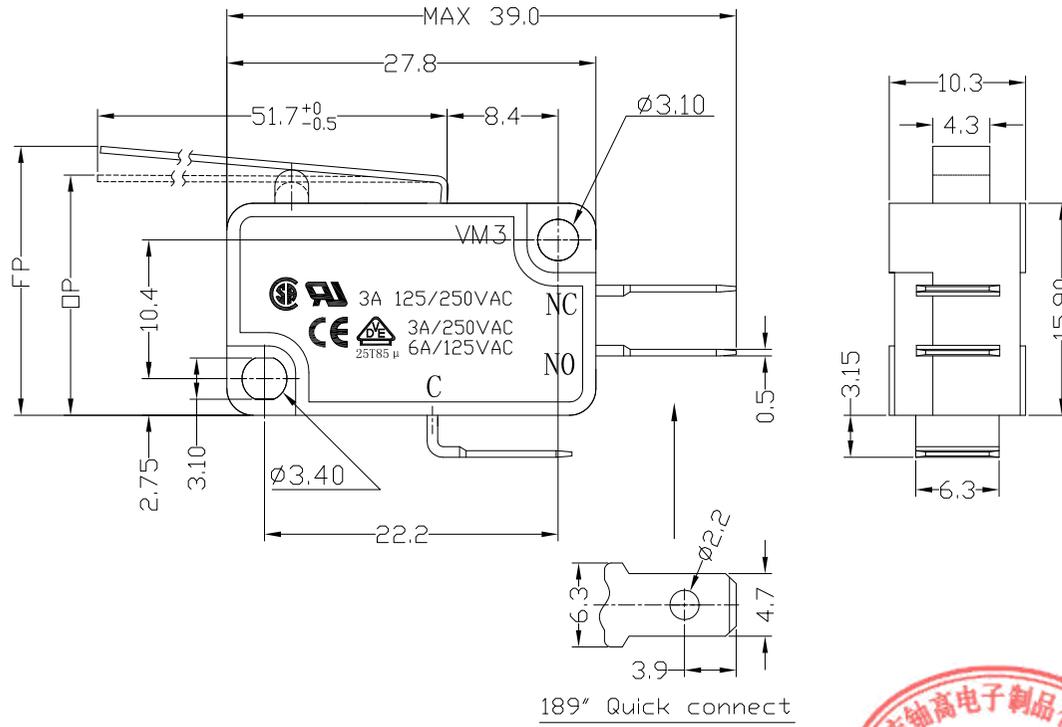


189" Quick connect

MODEL CODE

VM 3-03 X-XXS-U56

1 2 3 4 5 6 7

- 1.Series : VM
- 2.Current Rating : 3=3A 125/250VAC
- 3.Actuator : 00=Non-lever 01=99=Lever
- 4.Termination : see chart (N/K)
(2=SPST-NO / 16=SPST-NC)
- 5.Operating Force : see chart
- 6.Spring Material:S=SUS304
- 7.Contact type: U56=3Amps Contact



CIRCUIT DIAGRAM

1.Functional spec

1.1 Rated Voltage(AC)	125/250VAC
1.2 Rated Current(AC)	3A
1.3 Contact Resistance	≤100mΩ(Initial value)
1.4 Operating Force	25±10gf 40±15gf 60±25gf
1.5 Bounce Time	
1.6 Free Position	22.0±2.0mm
1.7 Operating Position	18.1±2.0mm
1.8 Position Travel	
1.9 Return Force	

2.Reliable Rating

2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	10,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V
2.4 Withstand Voltage	AC1500V 1 minute
2.5 Soldering Technic	Hand Soldering
2.6 Operating Temper	-25°C ~ +85°C
2.7 Ambient Humidity Used	<85%RH




Tolerance: ±0.2	UNITS mm	东莞市铀高电子制品有限公司			
	MAT'L				
	SEE NOTE	TITLE: MICRO SWITCH VM3 SERIES	PART NO: VM3-03N-XXS-U56		
	FINISH	DR: Ricky 2017/5/10	DWG NO: ATD-03X-XXS-U56		
	SEE NOTE	CHKD: Ricky 2017/5/10	SCALE	SHEET	REV.
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	APPD:	1:1	1/2	A
			CUSTOMER DRAWING		




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

Terminal Type

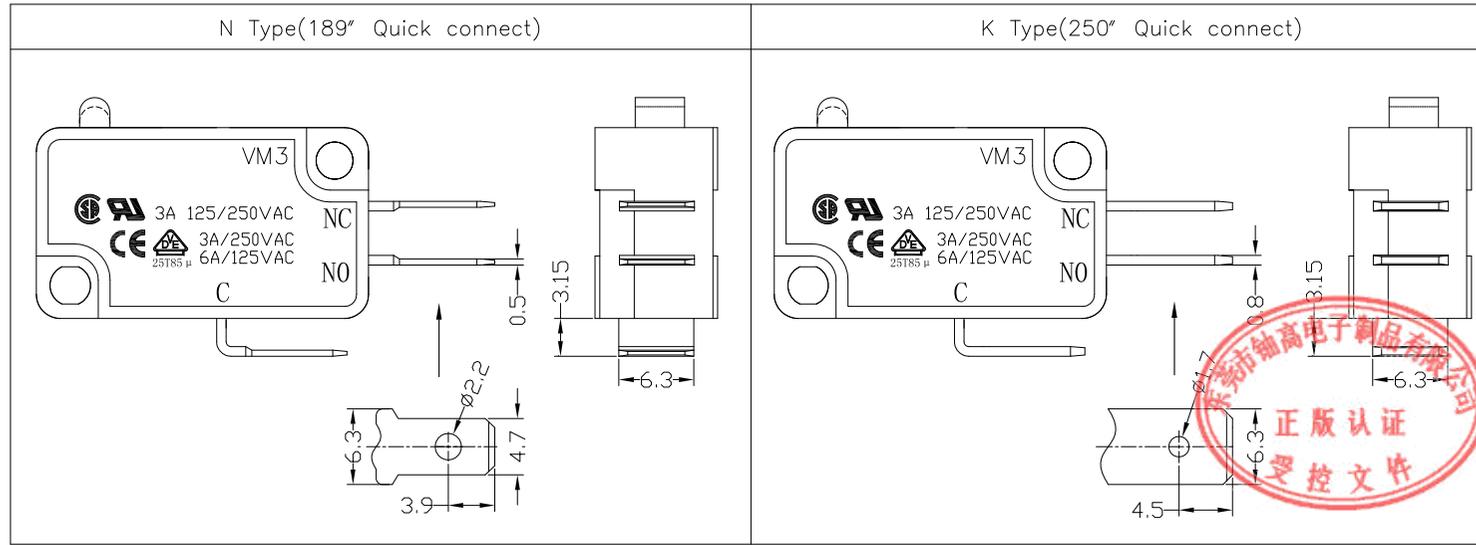

Structure chart

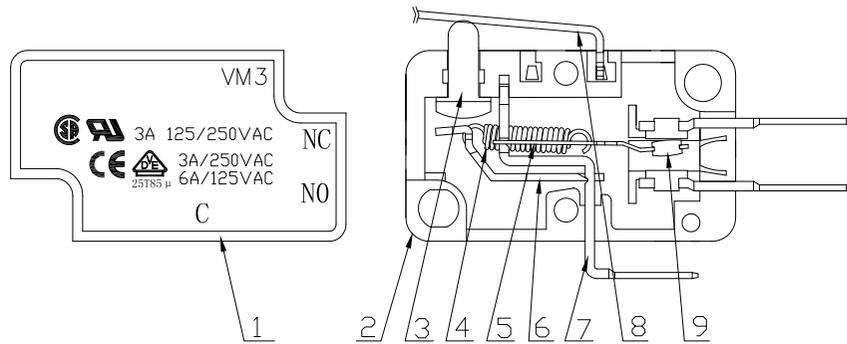

Material list


NO.	PARTS	MATERIAL	Q'TY	FINISHING	Tolerance: ±0.2	UNITS	东莞市铀高电子制品有限公司					
9	Contact	Silver alloy	3		mm	SEE NOTE	TITLE: MICRO SWITCH VM3 SERIES		PART NO.: VM3-03X-XXS-U56			
8	Lever	SUS301	1				SEE NOTE	DR: Ricky 2017/5/10		DWG NO.: ATD-03X-XXS-U56		
7	Terminal	C2680	3		SEE NOTE	Q'TY		CHKD: Ricky 2017/5/10		SCALE	SHEET	REV.
6	Fixed Rod	C2680	1				SEE NOTE	Q'TY	APPD:		1:1	2/2
5	Change Plate	C5210	1		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.							
4	Spring	SUS304	1									
3	Button	PBT	1	Gray								
2	Lower Housing	PBT	1	Black								
1	Upper Housing	PBT	1	Black								



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

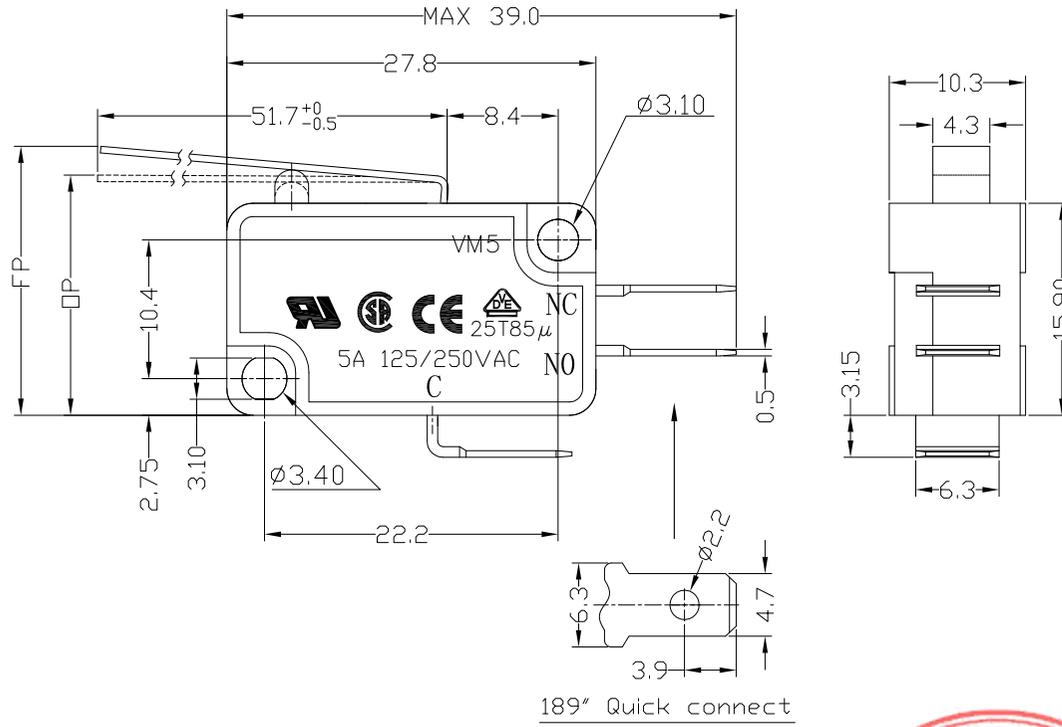


MODEL CODE

VM 5- 03 X-XXS-U10

1 2 3 4 5 6 7

- 1.Series : VM
- 2.Current Rating : 5=5A 125/250VAC
- 3.Actuator : 00=Non-lever 01-99=Lever
- 4.Termination : see chart (N/K)
(2=SPST-NO / 16=SPST-NC)
- 5.Operating Force : see chart
- 6.Spring Material:S=SUS304
- 7.Contact type: U10=5Amps Contact



CIRCUIT DIAGRAM

1.Functional spec

1.1 Rated Voltage(AC)	125/250VAC
1.2 Rated Current(AC)	5A
1.3 Contact Resistance	≤100mΩ(Initial value)
1.4 Operating Force	25±10gf 40±15gf 60±25gf
1.5 Bounce Time	
1.6 Free Position	22.0±2.0mm
1.7 Operating Position	18.1±2.0mm
1.8 Position Travel	
1.9 Return Force	

2.Reliable Rating

2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	10,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V
2.4 Withstand Voltage	AC1500V 1 minute
2.5 Soldering Technic	Hand Soldering
2.6 Operating Temper	-25°C ~ +85°C
2.7 Ambient Humidity Used	<85%RH




Tolerance: ±0.2	UNITS mm	东莞市铀高电子制品有限公司			
	MAT'L				
	SEE NOTE	TITLE: MICRO SWITCH VM5 SERIES	PART NO.: VM5-03N-XXS-U10		
	FINISH	DR: Ricky 2017/5/11	DWG NO.: ATD-03X-XXS-U10		
	SEE NOTE	CHKD: Ricky 2017/5/11	SCALE	SHEET	REV.
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	APPD:	1:1	1/2	A
					CUSTOMER DRAWING




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

Terminal Type

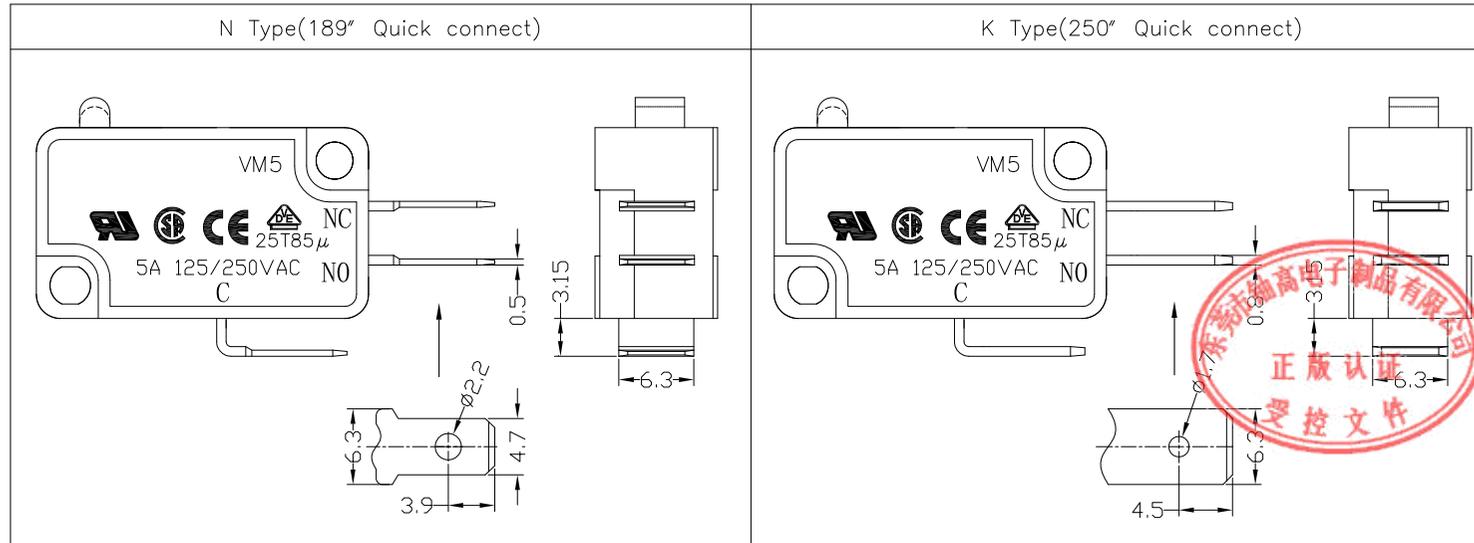

Structure chart

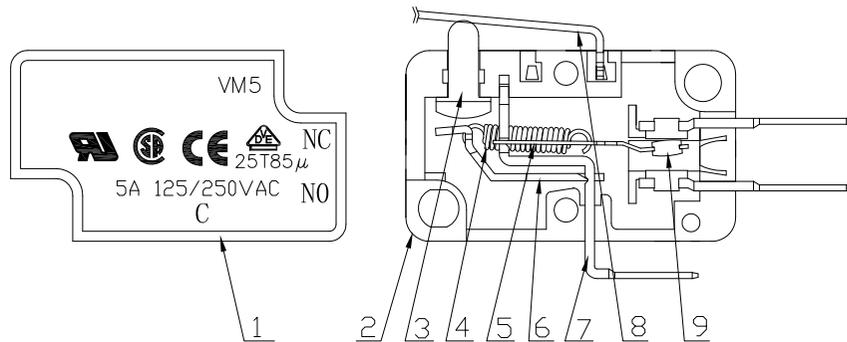

Material list

NO.	PARTS	MATERIAL	Q'TY	FINISHING	Tolerance:±0.2	UNITS	东莞市铀高电子制品有限公司				
9	Contact	Silver alloy	3		mm	SEE NOTE	TITLE:	PART NO.:			
8	Lever	SUS301	1				DR: <i>Ricky</i> 2017/5/11	VM5-03X-XXS-U10			
7	Terminal	C2680	3		SEE NOTE	FINISH	MICRO SWITCH VM5 SERIES		DWG NO.:		
6	Fixed Rod	C2680	1			DR: <i>Ricky</i> 2017/5/11	ATD-03X-XXS-U10				
5	Change Plate	C5210	1		SEE NOTE	Q'TY	CHKD: <i>Ricky</i> 2017/5/11	SCALE	SHEET	REV.	CUSTOMER
4	Spring	SUS304	1			APPD:	1:1	2/2	A	DRAWING	
3	Button	PBT	1	Gray	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE					
2	Lower Housing	PBT	1	Black							
1	Upper Housing	PBT	1	Black							