




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

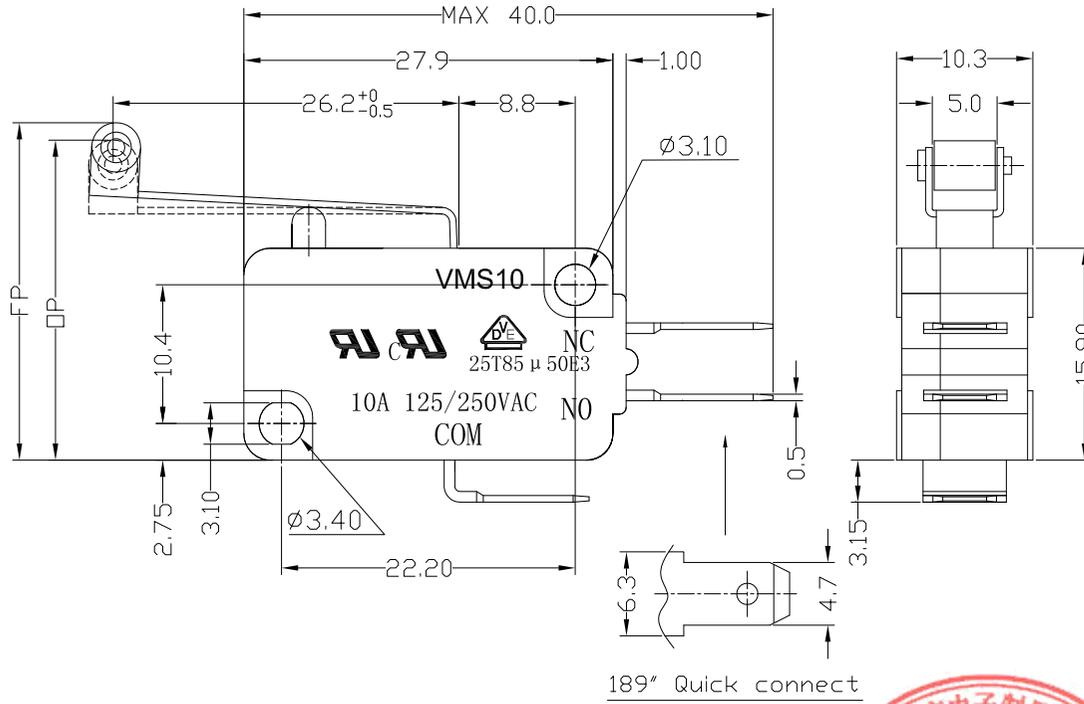

1.Functional spec

1.1 Rated Voltage(AC)	125/250VAC	
1.2 Rated Current(AC)	10A	
1.3 Contact Resistance	≤100mΩ(Initial value)	
1.4 Operating Force	80±25gf	125±40gf
1.5 Bounce Time		
1.6 Free Position	26.0±1.5mm	
1.7 Operating Position	23.5±1.5mm	
1.8 Position Travel		
1.9 Return Force		

2.Reliable Rating


2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	10,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V
2.4 Withstand Voltage	AC1500V 1 minute
2.5 Soldering Technic	Hand Soldering
2.6 Operating Temper	-25°C ~ +85°C
2.7 Ambient Humidity Used	<85%RH

MODEL CODE

VMS 10-06 X-XX-V10

1 2 3 4 5 6

- 1.Series : VMS
- 2.Current Rating : 10=10A 125/250VAC
- 3.Actuator : 00=Non-lever 01-99=Lever
- 4.Termination : see chart (N/K/J/L/W/A)
(7=SPST-NO / 16=SPST-NC)
- 5.Operating Force : see chart
- 6.Contact type: V10=10Amps Contact



CIRCUIT DIAGRAM




Tolerance: ±0.2		UNITS	东莞市铀高电子制品有限公司			
		mm				
		MAT'L	SEE NOTE		TITLE: MICRO SWITCH VMS10 SERIES	
		FINISH	SEE NOTE		PART NO.: VMS10-06N-XX-V10	
		Q'TY	DR: Ricky 2017/6/7		DWG NO.: ATD-06X-XX-V10	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			CHKD: Ricky 2017/6/7		SCALE	
			APPD:		1:1	SHEET 1/2




RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

Terminal Type

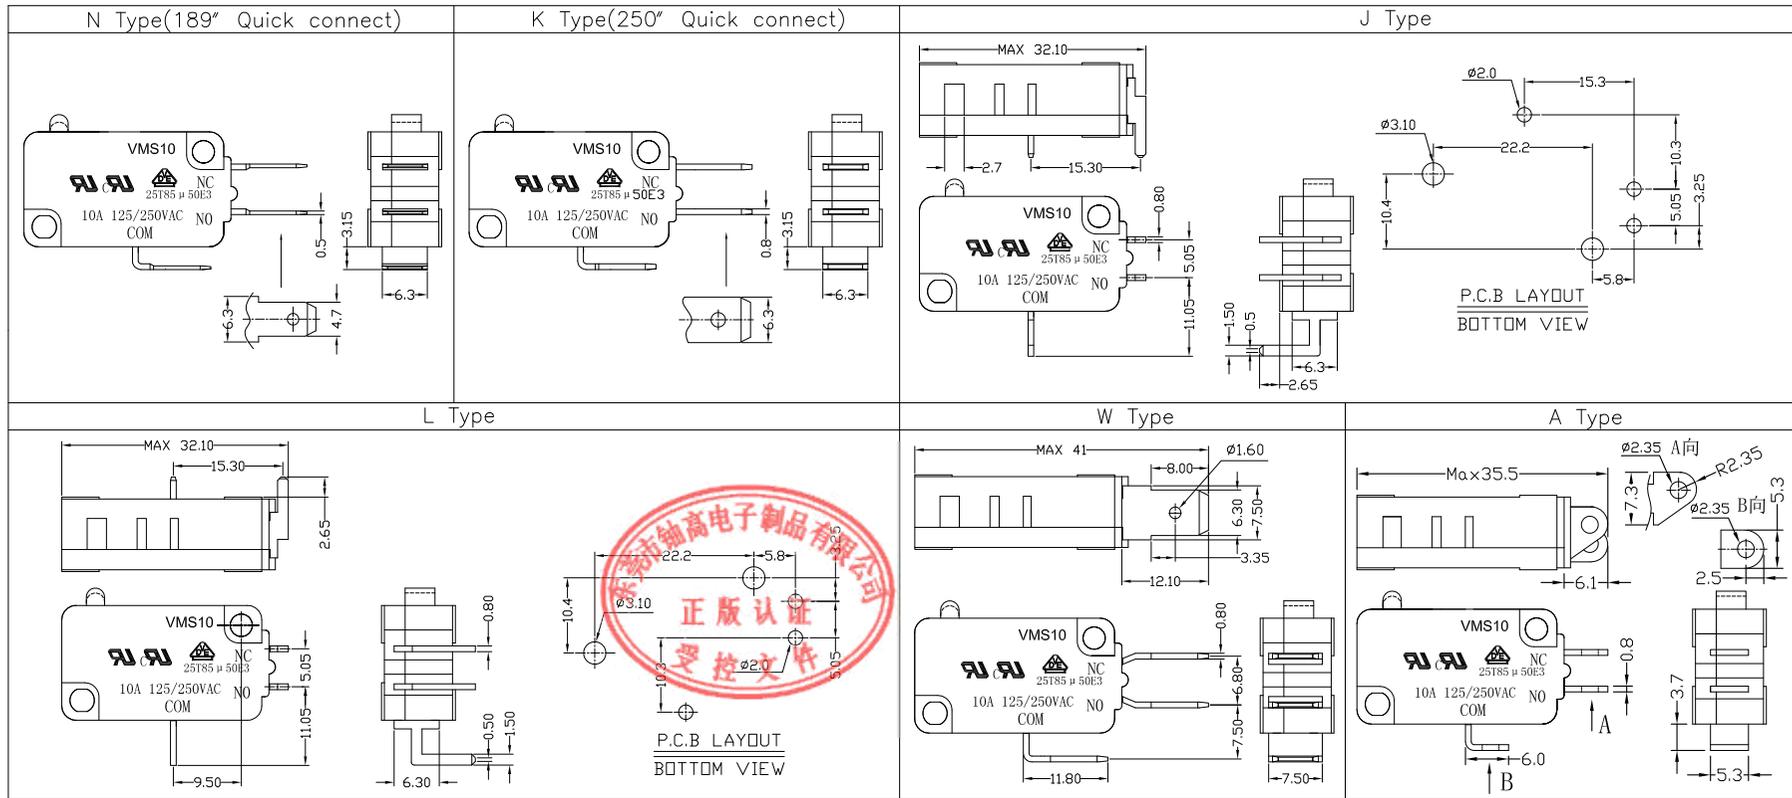

Structure chart

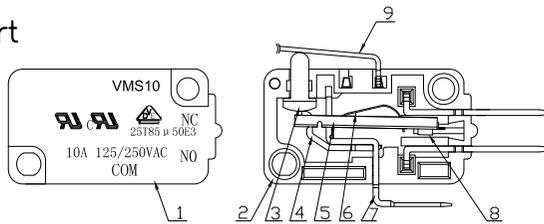

Material list


NO.	PARTS	MATERIAL	Q'TY	FINISHING	Tolerance: ±0.2	UNITS	东莞市铀高电子制品有限公司			
9	Lever	SUS301	1		mm	SEE NOTE	TITLE:		PART NO.:	
8	Contact	Silver alloy	3				MICRO SWITCH VM10 SERIES		VMS10-06X-XX-V10	
7	Terminal	C2680	3	Silver Plating	SEE NOTE	DR: <i>Ricky</i> 2017/6/7		DWG NO.:		
6	Spring Plate	C5210	1			MICRO SWITCH VM10 SERIES		ATD-06X-XX-V10		
5	Change Plate	C2680	1		SEE NOTE	CHKD: <i>Ricky</i> 2017/6/7		SCALE		
4	Fixed Rod	C2680	1			APPD:		11	2/2	REV.:
3	Button	PBT	1	Gray	Q'TY	APPD:		A	CUSTOMER	
2	Lower Housing	PBT	1	Black		DRAWING				
1	Upper Housing	PBT	1	Black	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.					



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

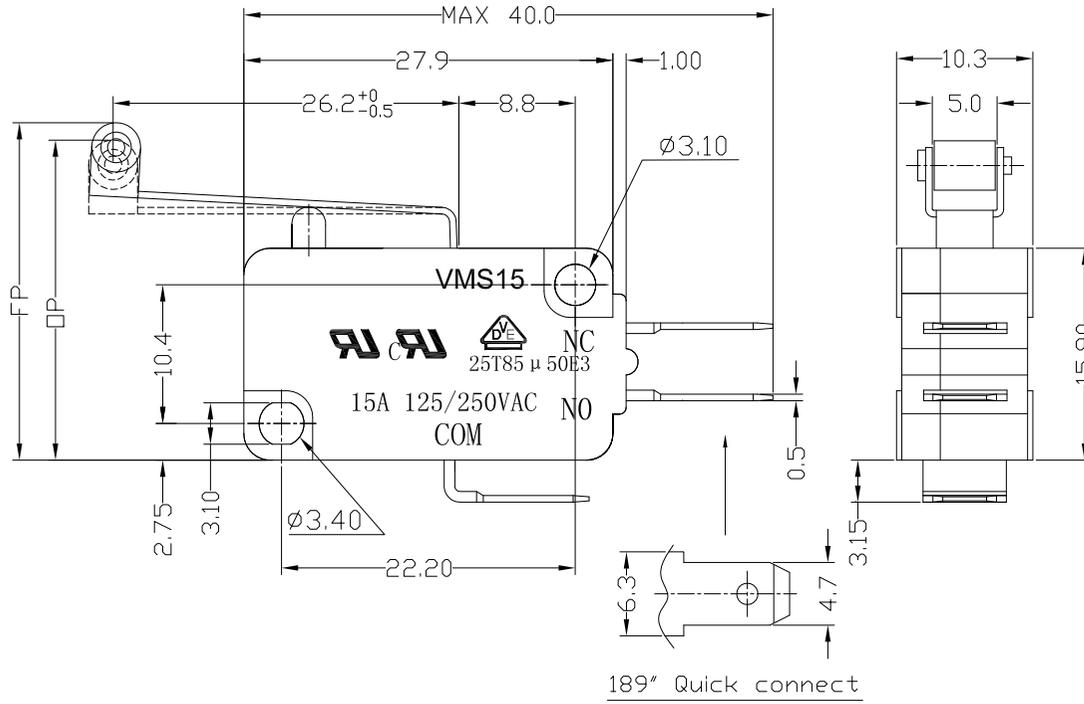

1.Functional spec

1.1 Rated Voltage(AC)	125/250VAC	
1.2 Rated Current(AC)	15A	
1.3 Contact Resistance	≤100mΩ(Initial value)	
1.4 Operating Force	80±25gf	125±40gf
1.5 Bounce Time		
1.6 Free Position	26.0±1.5mm	
1.7 Operating Position	23.5±1.5mm	
1.8 Position Travel		
1.9 Return Force		

2.Reliable Rating


2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	10,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V
2.4 Withstand Voltage	AC1500V 1 minute
2.5 Soldering Technic	Hand Soldering
2.6 Operating Temper	-25°C ~ +85°C
2.7 Ambient Humidity Used	<85%RH

MODEL CODE

VMS 15-06 X-XX-V15

1 2 3 4 5 6

- Series : VMS
- Current Rating : 15=15A 125/250VAC
- Actuator : 00=Non-lever 01-99=Lever
- Termination : see chart (N/K/J/L/W/A)
(7=SPST-NO / 16=SPST-NC)
- Operating Force : see chart
- Contact type: V15=15Amps Contact



CIRCUIT DIAGRAM



Tolerance: ±0.2	UNITS mm	东莞市铀高电子制品有限公司			
	MAT'L				
	SEE NOTE	TITLE: MICRO SWITCH VMS15 SERIES	PART NO.: VMS15-06N-XX-V15		
	FINISH	DR: Ricky 2017/6/8	DWG NO.: ATD-06X-XX-V15		
	SEE NOTE	CHKD: Ricky 2017/6/8	SCALE	SHEET	REV.
	Q'TY	APPD:	1:1	1/2	A
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			CUSTOMER DRAWING		

